
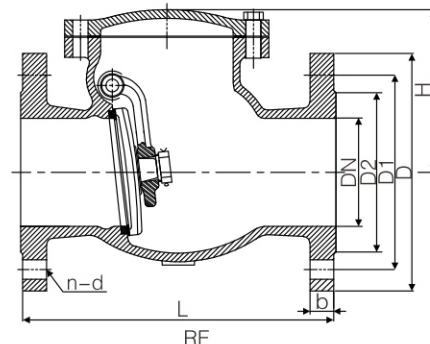


美标旋启式止回阀 ANSI Swing Type Check Valve

FC-020

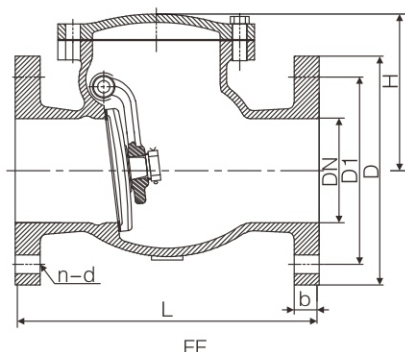

标准 Standard

设计标准 Design Standard	结构长度 Face to Face	法兰连接 Flanges connection
ANSI BS1868	ANSI B16.10	ANSI B16.1 ANSI B16.5

性能规范 Performance specification

公称压力等级 Nominal pressure	壳体测试 Shell test	密封测试 Sealing test
125LB	2.5MPa	1.71MPa
150LB	3.0MPa	2.2MPa

主要零件材料 Main parts materials

阀体 Body	阀盖 Bonnet	阀瓣 Disc	阀座 Seat	销轴 Pin	工作温度 °C Working temperature	适用介质 Suitable medium
A126 A536	A126 A536	A126/A536 with Brass/Bronze/ Stainless Steel	Brass Bronze Stainless Steel	2Cr13 SS304	-20°C-120°C	Water Steam Oil Gas

主要外型及连接尺寸 Main external and connection dimension

125LB

DN	1 1/2"	2"	2 1/2"	3"	4"	5"	6"	8"	10"	12"
L	165	203	216	241	292	330	356	495	622	698
D	127	152	178	191	229	254	279	343	406	483
D1	99	121	140	152	191	216	241	299	362	432
b	14	16	18	19	24	24	25	29	30	32
n-d	4-16	4-18	4-18	4-18	8-18	8-22	8-22	8-22	12-26	12-26
H	120	137	147	159	180	203	223	258	290	325

150LB

DN	1 1/2"	2"	2 1/2"	3"	4"	5"	6"	8"	10"	12"
L	165	203	216	241	292	330	356	495	622	698
D	127	152	178	191	229	254	279	343	406	483
D1	99	121	140	152	191	216	241	299	362	432
D2	78	99	118	129	168	193	213	271	332	402
b	14	16	18	19	24	24	25	29	30	32
n-d	4-16	4-19	4-19	4-19	8-19	8-23	8-23	8-23	12-26	12-26
H	120	137	147	159	180	203	223	258	290	325