


德标DIN3352-F4暗杆硬密封闸阀 DIN3352-F4 Non-rising Stem Metal Seat Gate Valve

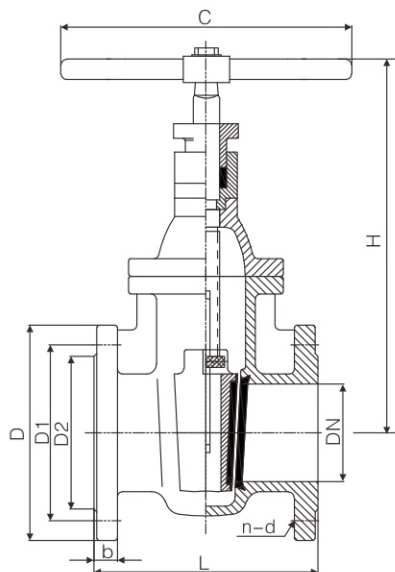

标准 Standard

设计标准 Design Standard	结构长度 Face to Face	法兰连接 Flanges connection
DIN3352 EN558	DIN3202-F4 EN558-14	DIN2532 DIN2533 DIN2501 EN1092

性能规范 Performance specification

公称压力等级 Nominal pressure	壳体测试 Shell test	密封测试 Sealing test	上密封测试 Back seal test
PN10	1.5MPa	1.1MPa	1.1MPa
PN16	2.4MPa	1.76MPa	1.76MPa

主要零件材料 Main parts materials

阀体 Body	阀盖 Bonnet	阀杆 Stem	阀瓣 Disc	阀座 Seat	螺母 Stem Nut	工作温度 °C Working temperature	适用介质 Suitable medium
GG20 GG25 GGG40 GGG50	GG20 GG25 GGG40 GGG50	2Cr13 SS304 SS316 BRASS	GG20/GG25 GGG40/GGG50 with Brass/Bronze/ Stainless Steel	Brass Bronze Stainless Steel	Brass	-20°C-120°C	Water Steam Oil Gas

主要外型及连接尺寸 Main external and connection dimension

PN10

DN	50	65	80	100	125	150	200	250	300
L	150	170	180	190	200	210	230	250	270
D	165	185	200	220	250	285	340	395	445
D1	125	145	160	180	210	240	295	350	400
D2	102	122	138	158	188	212	268	320	370
b	20	20	22	24	26	26	26	28	28
n-d	4-18	4-18	8-18	8-18	8-18	8-22	8-22	12-22	12-22
H	250	265	300	350	410	450	550	650	710
C	180	180	200	200	280	280	320	350	350

PN16

DN	50	65	80	100	125	150	200	250	300
L	150	170	180	190	200	210	230	250	270
D	165	185	200	220	250	285	340	405	460
D1	125	145	160	180	210	240	295	355	410
D2	102	122	138	158	188	212	268	320	378
b	20	20	22	24	26	26	26	28	28
n-d	4-18	4-18	8-18	8-18	8-18	8-22	12-22	12-28	12-28
H	250	265	300	350	410	450	550	650	710
C	180	180	200	200	280	280	320	350	350