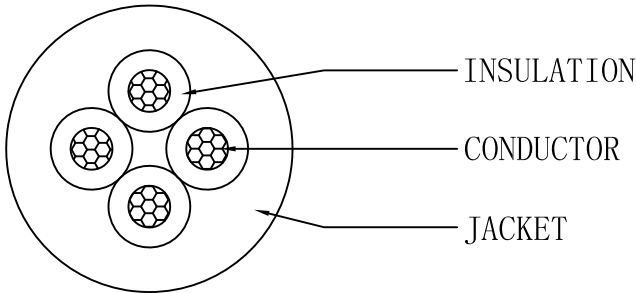


SPECIFICATION

UL Model:	UL2464	Document Number	Made Date	Rev:
Specification:	28AWGx4C	WCH16041911	2016-04-19	1.0V
Cross Section				
Technical Parameters				
Conductor	Specification (AWG)	28		
	Material	Tinned Stranded Copper		
	Configuration (mm)	TS7/0.127±0.007		
Insulation	Average Thickness (mm)	0.38		
	Minimum Thickness (mm)	0.30		
	Over Diameter (mm)	1.20±0.10		
	Material	Polypropylene PP (RoHS)		
	Colour	Black, White, Red, Green		
Assembly	FILLER	No Filler		
	Screened Shield (mm)	No Shield		
Jacket	Average Thickness (mm)	1.00		
	Minimum Thickness (mm)	0.80		
	Over Diameter (mm)	5.00±0.20		
	Material	PVC (RoHS)		
	Colour	Black		
Electrical Capability	Rated Temperature (°C)	80		
	Rated Voltage (V)	300		
	Conductor Resistance (Ω/KM 20°C)	239		
	Insulation Resistance (MΩ/KM 20°C)	100		
Marking	As per standard of UL2464			