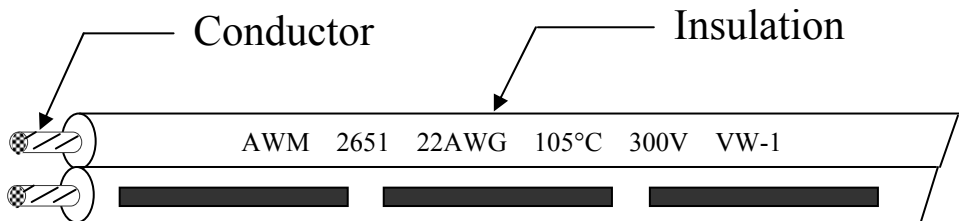


SPECIFICATION

Style number:	UL2651	Document No.	Made date	Rev:
Specification:	22AWGx2P	WCH19031602	2019-03-16	1.0V
Cross Section	Conductor Insulation 			
Technical Parameters				
Conductor	Specification		22AWG	
	Material		Tinned Stranded Copper	
	Configuration (mm)		TS17/0.16±0.007	
Insulation	Average Thickness (mm)		0.49	
	Minimum Thickness (mm)		0.42	
	Over Diameter (mm)		1.80±0.10*3.60±0.20	
	Material		PVC/38P (RoHS)	
	Colour		White with Stripe (1P)	
Jacket	Average Thickness (mm)		--	
	Minimum Thickness (mm)		--	
	Over Diameter (mm)		--	
	Material		--	
	Colour		--	
Electrical Capability	Rated Temperature (°C)		-10~105	
	Rated Voltage (V)		300	
	Conductor Resistance (Ω/KM 20°C)		59.4	
	Insulation Resistance (MΩ/KM 20°C)		10	
Marking	UL AWM 2651 22AWG 105°C 300V VW-1 CSA AWM I A 22AWG FT1 105°C 300V +LF+ ***** (Date Code)			

SPECIFICATION

Style number:	UL2651	Document No.	Made date	Rev:
Specification:	22AWGx2P	WCH19031602	2019-03-16	1.0V
Cross Section	