


SPECIFICATION

UL Model:	UL2464	Document Number	Made Date	Rev:
Specification:	22AWGx7C	WCH16082103	2016/08/21	1.0V
Cross Section				
Technical Parameters				
Conductor	Specification (AWG)	22		
	Material	Tinned Stranded Copper		
	Configuration (mm)	TS7/0.254±0.007		
Insulation	Average Thickness (mm)	0.25		
	Minimum Thickness (mm)	0.21		
	Over Diameter (mm)	1.30±0.10		
	Material	SR-PVC (RoHS)		
	Colour	TBD		
Assembly	FILLER	--		
	Cotton Papper (mm)	--		
Jacket	Average Thickness (mm)	0.80		
	Minimum Thickness (mm)	0.64		
	Over Diameter (mm)	5.50±0.30		
	Material	PVC (RoHS)		
	Colour	Black		
Electrical Capability	Rated Temperature (°C)	80		
	Rated Voltage (V)	300		
	Conductor Resistance (Ω/KM 20°C)	59.4		
	Insulation Resistance (MΩ/KM 20°C)	10		
Marking	As per standard of UL2464			

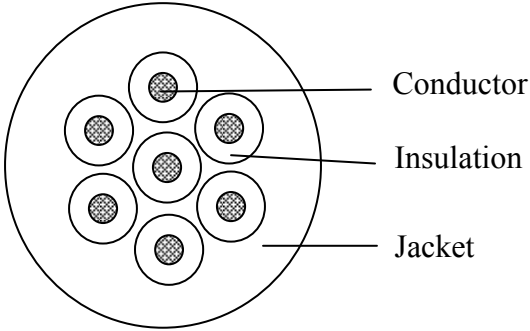