


SPECIFICATION

Part number:	UL2464	Document Number	Made Date	Rev:
Specification:	24AWGx2C	WCH16032501	2016-03-25	1.0V
Cross Section				
Technical Parameters				
Conductor	Specification (awg)	24		
	Material	Tinned Stranded Copper		
	Configuration (mm)	TS11/0.16±0.007		
Insulation	Average Thickness (mm)	0.23		
	Minimum Thickness (mm)	0.20		
	Over Diameter (mm)	1.10±0.10		
	Material	SR-PVC (RoHS)		
	Colour	Black, Red		
Assembly	Filler	--		
	Drain (mm)	--		
	Aluminum Foil	--		
Jacket	Average Thickness (mm)	0.85		
	Minimum Thickness (mm)	0.68		
	Over Diameter (mm)	3.90±0.15		
	Material	PVC (RoHS)		
	Colour	Black		
Electrical Capability	Rated Temperature (°C)	80		
	Rated Voltage (V)	300		
	Conductor Resistance (Ω/KM 20°C)	94.2		
	Insulation Resistance (MΩ/KM 20°C)	10		
Remark	As per standard of UL2464			

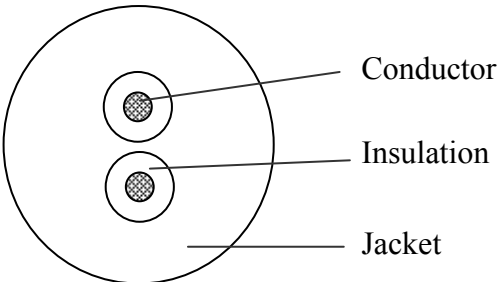