


# SPECIFICATION

UL Model:	UL2464	Document Number	Made Date	Rev:
Specification:	28AWGx6C	WCH16072507	2016/07/25	1.0V
Cross Section				
<b>Technical Parameters</b>				
Conductor	Specification	(AWG)	28	
	Material		Tinned Stranded Copper	
	Configuration	(mm)	TS7/0.127±0.007	
Insulation	Average Thickness	(mm)	0.25	
	Minimum Thickness	(mm)	0.20	
	Over Diameter	(mm)	0.90±0.08	
	Material		SR-PVC (RoHS)	
	Colour		Black, White, Red, Yellow, Blue, Green	
Assembly	Filler		10/5SOL*1PCS	
	Drain Wire		TS7/0.127±0.007	
	Screened Shield	(mm)	One Side Aluminum (AL Facing Inside)	
Jacket	Average Thickness	(mm)	0.85	
	Minimum Thickness	(mm)	0.68	
	Over Diameter	(mm)	4.50±0.20	
	Material		PVC (RoHS)	
	Colour		Black	
Electrical Capability	Rated Temperature	(°C)	80	
	Rated Voltage	(V)	300	
	Conductor Resistance	(Ω/KM 20°C)	239	
	Insulation Resistance	(MΩ/KM 20°C)	10	
Marking	As per standard of UL2464			

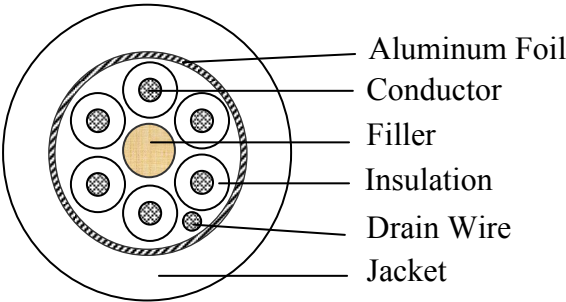