


# SPECIFICATION

Part number:	UL20549	Document Nr	Made date	Rev:
Specification:	22AWG*2C+D	WCH17032308	2017-03-23	1.0V
Cross Section				
<b>Technical Parameters</b>				
Conductor	Specification (awg)	22		
	Material	Tinned Stranded Copper		
	Configuration (mm)	TS17/0.16±0.007		
Insulation	Average Thickness (mm)	0.25		
	Minimum Thickness (mm)	0.21		
	Over Diameter (mm)	1.30±0.10		
	Material	LSZH (RoHS+Reach)		
	Colour	Black, Red		
Assembly	Filler	Cotton Filler		
	Drain (mm)	TS11/0.16±0.007		
	Aluminum Foil	One Side Aluminum		
Jacket	Average Thickness (mm)	0.76		
	Minimum Thickness (mm)	0.61		
	Over Diameter (mm)	4.20±0.20		
	Material	TPU (RoHS+Reach)		
	Colour	Black		
Electrical Capability	Rated Temperature (°C)	80		
	Rated Voltage (V)	300		
	Conductor Resistance (Ω/KM 20°C)	59.4		
	Insulation Resistance (MΩ/KM 20°C)	100		
Remark	Moisture, UV resistant, Rodent repellent			

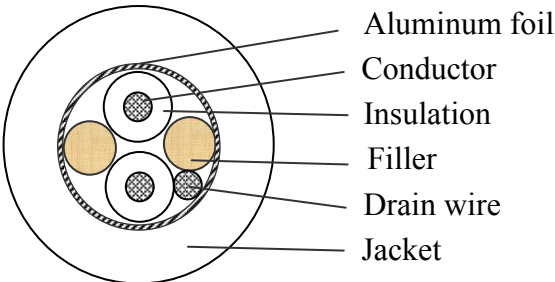