


SPECIFICATION

UL Model:	UL20549	Document Number	Made date	Rev:
Specification:	20AWGx3C+26AWGx2C	WCH17042103	2017/04/21	1.0V

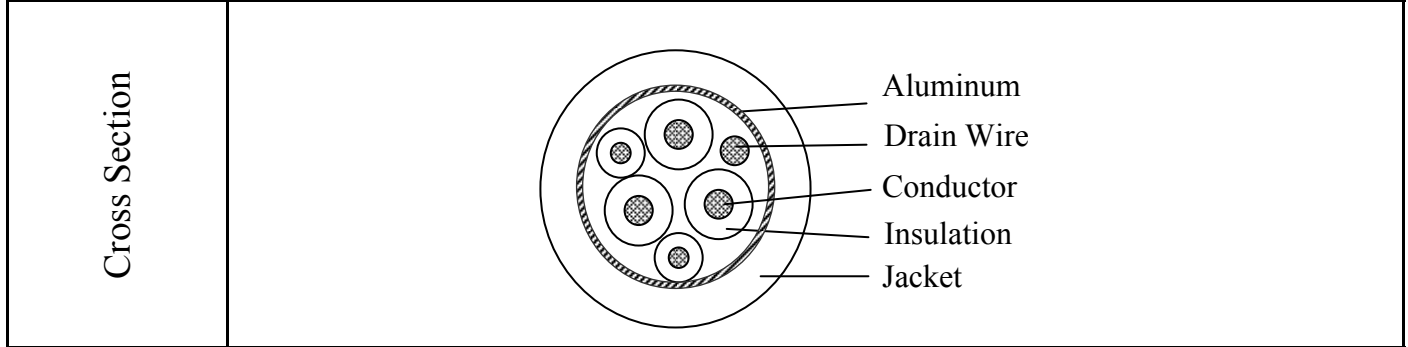

Technical Parameters

Conductor	Specification	(AWG)	20	26
	Material		Tinned Stranded Copper	Tinned Stranded Copper
	Configuration	(mm)	TS21/0.178±0.007	TS7/0.16±0.007
Insulation	Average Thickness	(mm)	0.26	0.24
	Minimum Thickness	(mm)	0.22	0.2
	Over Diameter	(mm)	1.50±0.10	1.00±0.10
	Material		PP (RoHS)	PP (RoHS)
	Colour		Black, Brown, Red	Orange, Yellow
Assembly	Drain Wire		TS7/0.16±0.007	
	Aluminum Foil	(mm)	One Side Aluminum	
Jacket	Average Thickness	(mm)	0.85	
	Minimum Thickness	(mm)	0.68	
	Over Diameter	(mm)	5.40±0.20	
	Material		TPU (RoHS), FT2	
	Colour		Black	
Electrical Capability	Rated Temperature	(°C)	80	
	Rated Voltage	(V)	300	
	Conductor Resistance	(Ω/KM 20°C)	20AWG: 36.7; 26AWG: 150	
	Insulation Resistance	(MΩ/KM 20°C)	100	
Marking	As per standard of UL20549			

