

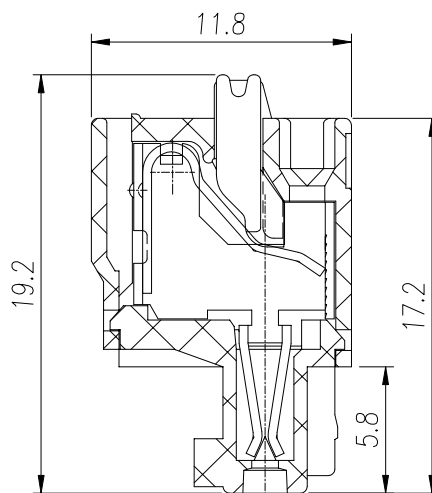


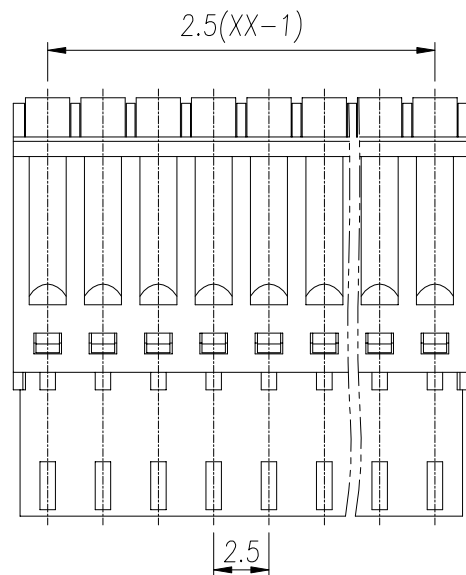


浙江连芯电子技术有限公司

Zhejiang Lianxin Electronic Technology Co.,Ltd

产品规格书
THE SPEC SHEET

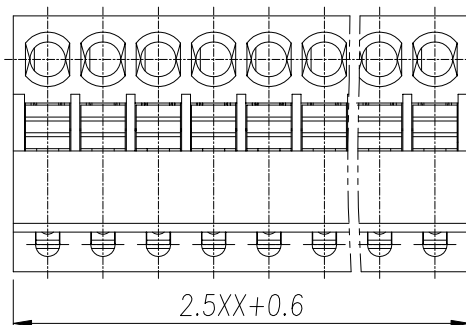

参考标准/Standard	UL	IEC
额定电压/Rated voltage	150V	130V
额定电流/Rated current	5A	6A
接触电阻/Contact resistanc	20MΩ	
绝缘电阻/Insulation resistance	500MΩ/DC500V	
使用线径/Wire range	26~20AWG 0.5mm ²	
耐电压 / Wrth standing voltage	AC1500V/1Min	
机械性能/Mechanical		
剥线长度/Wire stripping length	7~8mm	
温度范围/Temp. Range	-40℃~+105℃	
瞬间温度/MAX Soldering		
尺寸/Dimensins		
间距/Pitch	2.5mm	
极数/Poles	2~24P	
材质及电镀/Material		
塑件/Housing	PA66,UL94V-0	
夹子/Clip	磷青铜, 镀镍	
弹片/shrapnel	不锈钢	

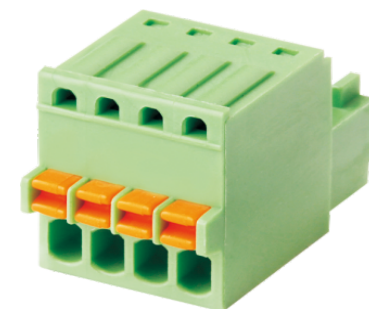

	linear dimension(Tolerances Standard GB/T 14486-2008)											≡	—	□	//	⊥
variable range	to 6	over 6 to 10	over 10 to 18	over 18 to 30	over 30 to 50	over 50 to 80	over 80 to 120	over 120 to 160	over 160 to 200	over 200 to 250	all	to 5	over 5 to 30	over 30 to 120	over 120 to	
tolerance	±0.1	±0.14	±0.19	±0.25	±0.32	±0.43	±0.57	±0.72	±0.88	±1.05	±1.25	0.5	0.025	0.06	0.12	0.4

单位 / UNITS	mm	尺寸 / SIZE	A4	比例 / SCALE	1:1	第三视角 / THIRD ANGLE PROJECTION	
浙江连芯电子技术有限公司 LXLYM Zhejiang Lianxin Electronic Technology Co.,Ltd						名称 / TITLE	LXLYM -15EDGKD