






浙江连芯电子技术有限公司


Zhejiang Lianxin Electronic Technology Co.,Ltd

产品规格书

THE SPEC SHEET

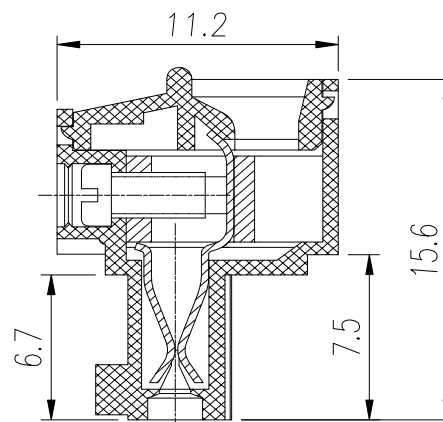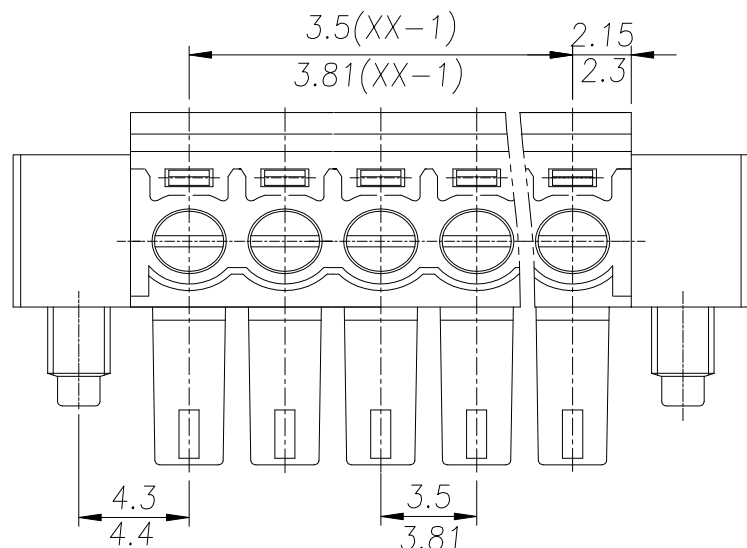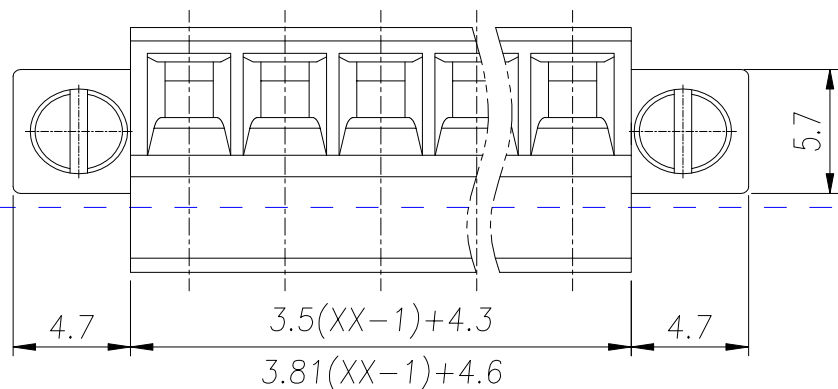

参考标准/Standard	UL	IEC
额定电压/Rated voltage	300V	250V
额定电流/Rated current	8A	7A
接触电阻/Contact resistance	20MΩ	
绝缘电阻/Insulation resistance	500MΩ/DC500V	
使用线径/Wire range	28~16AWG 1.5MM ²	
耐电压 /Wrth standing voltage	AC2000V/1Min	
机械性能/Mechanical		
扭矩/Torque	2.04kgf-cm/0.2Nm/1.77Lbin	
温度范围/Temp. Range	-40℃~+105℃	
瞬间温度/MAX Soldering	+ 250℃5秒	
尺寸/Dimensions		
间距/Pitch	3.5/3.81mm	
极数/Poles		
材质及电镀/Material		
塑件/Housing	PA66,UL94V-0	
螺丝/Screws	M2.0钢, 镀锌	
夹片/clip	磷青铜, 镀镍	

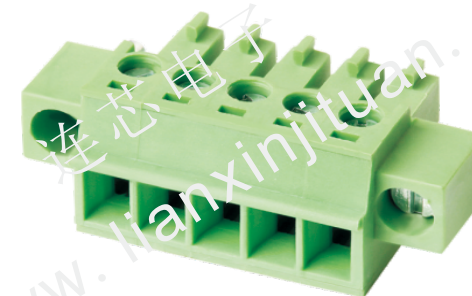

	linear dimension(Tolerances Standard GB/T 14486-2008)										≡	—	□	//	⊥	
variable range	to 6	over 6 to 10	over 10 to 18	over 18 to 30	over 30 to 50	over 50 to 80	over 80 to 120	over 120 to 160	over 160 to 200	over 200 to 250	all	to 5	over 5 to 30	over 30 to 120	over 120 to	
tolerance	±0.1	±0.14	±0.19	±0.25	±0.32	±0.43	±0.57	±0.72	±0.88	±1.05	±1.25	0.5	0.025	0.06	0.12	0.4

单位 / UNITS	mm	尺寸 / SIZE	A4	比例 / SCALE	3:1	第三视角 / THIRD ANGLE PROJECTION	
						名称	TITLE
浙江连芯电子技术有限公司 LXLYM Zhejiang Lianxin Electronic Technology Co.,Ltd						LXLYM -15EDGKM	