

Metal Oxide Varistor Data Sheet


Features

- TMOV integrated thermal protection device
- High peak surge current rating up to 10KA
- Designed to facilitate compliance to UL1449 for TVSS products
- Wide operating voltage (V_{1mA}) range from 18V to 1200V
- Rated current: 15A
- Rated Functioning Temperature: 136(°C)
- Fast responding to transient over-voltage and limited current
- Large absorbing transient energy capability
- Low clamping ratio and no follow-on current
- Three-lead version available for indication purposes
- Meets MSL level 1, per J-STD-020
- Operating Temperature: -40°C ~ +85°C
- Storage Temperature: -40°C ~ +85°C
- Safety certification: UL: E327997


Applications

- AC power line or AC/DC supplies
- Transistor, diode, IC, thyristor or triac semiconductor protection
- Surge protection in consumer electronics
- Surge protection in industrial electronics
- Surge protection in electronic home appliances, gas and petroleum appliances
- Relay and electromagnetic valve surge absorption
- AC panel protection Modules

Part number code

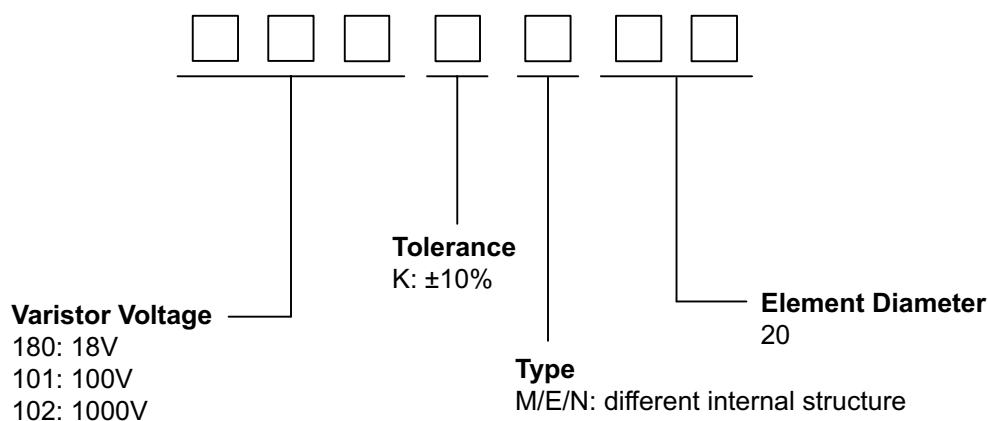

Lead configurations and application examples

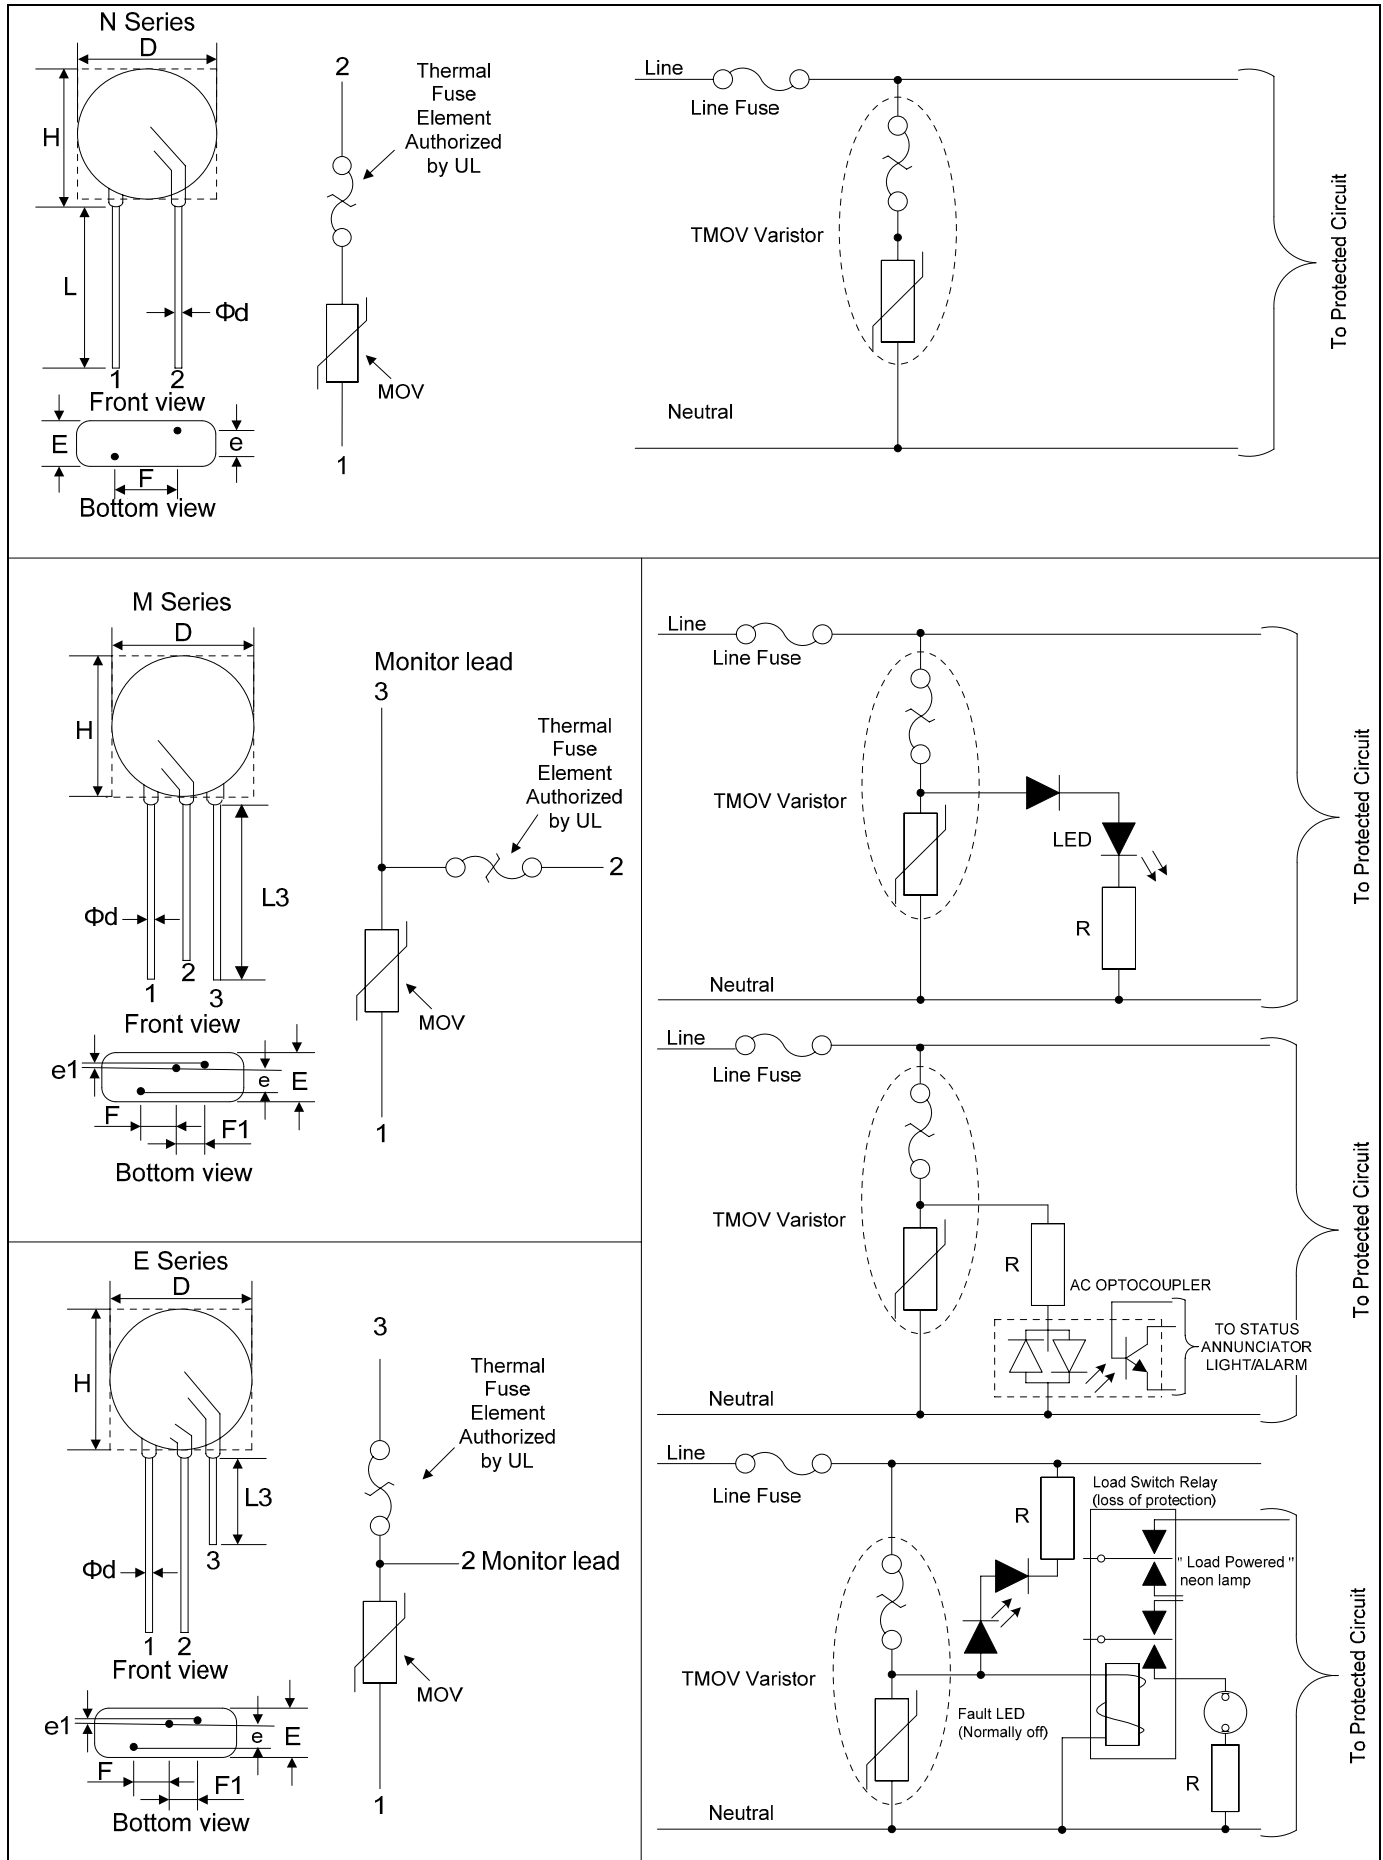

Dimensions

Symbol		BK'S M / E / N Varistor			Unit: mm
		20M	20E	20N	
D (max.)		24.0	24.0	24.0	
H (max.)		26.0	26.0	26.0	
F (±1.0)		7.5	7.5	12.5	7.5
F1 (±1.0)		5.0	5.0	-	
e (max.)	180K~121K	3.0	3.0	3.0	
	151K~391K	3.8	3.8	3.8	
	431K~621K	5.5	5.5	5.5	
	681K~911K	7.8	7.8	7.8	
	102K~122K	10.0	10.0	10.0	
e1	180K~121K	1.5±1.0	1.5±1.0	-	
	151K~391K				
	431K~621K				
	681K~911K				
	102K~122K				
E (max.)	180K~121K	9.0	9.0	9.0	
	151K~391K	9.8	9.8	9.8	
	431K~621K	11.5	11.5	11.5	
	681K~911K	13.8	13.8	13.8	
	102K~122K	16.0	16.0	16.0	
L (min.)		20.0	20.0	20.0	
L3 (min.)		10.0	10.0	-	
Φd		1.0			

Electrical characteristics

Part Number	Maximum Allowable Voltage		Varistor Voltage	Maximum Clamping Voltage		Maximum Peak Current (8/20μs)		Maximum Energy (Joule)		Rated Power	Typical Capacitance (Reference)			
	V _{AC} (V)	V _{DC} (V)		V _{1mA} (V)	I _P (A)	V _C (V)	1 time	2 times	10/1000μs			2ms	(W)	@1KHz (pf)
							(A)							
180KM(E,N)20	11	14	18(15~21.6)	20	36	3000	2000	13	10	0.2	28500			
220KM(E,N)20	14	18	22(19.5~26)	20	43	3000	2000	16	12	0.2	18500			
270KM(E,N)20	17	22	27(24~31)	20	53	3000	2000	19	14	0.2	13000			
330KM(E,N)20	20	26	33(29.5~36.5)	20	65	3000	2000	24	18	0.2	11500			
390KM(E,N)20	25	31	39(35~43)	20	77	3000	2000	28	21	0.2	8500			
470KM(E,N)20	30	38	47(42~52)	20	93	5000	3000	34	25	0.2	7400			
560KM(E,N)20	35	45	56(50~62)	20	110	5000	3000	41	30	0.2	6500			
680KM(E,N)20	40	56	68(61~75)	20	135	5000	3000	49	37	0.2	5800			
820KM(E,N)20	50	65	82(74~90)	100	135	6500	4500	56	42	1.0	4900			
101KM(E,N)20	60	85	100(90~110)	100	165	6500	4500	70	52	1.0	4000			
121KM(E,N)20	75	100	120(108~132)	100	200	6500	4500	85	63	1.0	3300			
151KM(E,N)20	95	125	150(135~165)	100	250	10000	8000	100	70	1.0	2700			
181KM(E,N)20	115	150	180(162~198)	100	300	10000	8000	110	80	1.0	2200			
201KM(E,N)20	130	170	200(185~225)	100	340	10000	8000	140	100	1.0	2000			
221KM(E,N)20	140	180	220(198~242)	100	365	10000	8000	155	110	1.0	1800			
241KM(E,N)20	150	200	240(216~264)	100	395	10000	8000	170	120	1.0	1650			
271KM(E,N)20	175	225	270(243~297)	100	455	10000	8000	190	135	1.0	1500			
301KM(E,N)20	190	250	300(270~330)	100	500	10000	8000	205	145	1.0	1300			
331KM(E,N)20	210	275	330(297~363)	100	550	10000	8000	215	150	1.0	1200			
361KM(E,N)20	230	300	360(324~396)	100	595	10000	8000	225	160	1.0	1100			
391KM(E,N)20	250	320	390(351~429)	100	650	10000	8000	240	170	1.0	1000			
431KM(E,N)20	275	350	430(387~473)	100	710	10000	8000	270	190	1.0	930			
471KM(E,N)20	300	385	470(423~517)	100	775	10000	8000	350	250	1.0	850			
511KM(E,N)20	320	415	510(459~561)	100	845	10000	8000	380	270	1.0	780			
561KM(E,N)20	350	460	560(504~616)	100	920	10000	8000	400	280	1.0	710			
621KM(E,N)20	385	505	620(558~682)	100	1025	10000	8000	425	300	1.0	650			
681KM(E,N)20	420	560	680(612~748)	100	1120	10000	8000	435	310	1.0	600			
751KM(E,N)20	460	615	750(675~825)	100	1240	10000	8000	455	327	1.0	530			
781KM(E,N)20	485	640	780(702~858)	100	1290	10000	8000	461	335	1.0	510			
821KM(E,N)20	510	670	820(738~902)	100	1355	10000	8000	475	344	1.0	500			
911KM(E,N)20	550	745	910(819~1001)	100	1500	10000	8000	500	350	1.0	440			
102KM(E,N)20	625	825	1000(900~1100)	100	1650	10000	8000	560	400	1.0	400			
112KM(E,N)20	680	895	1100(990~1210)	100	1815	10000	8000	610	430	1.0	360			
122KM(E,N)20	750	990	1200(1080~1320)	100	1980	10000	8000	650	460	1.0	320			



Mechanical Characteristics

Items	Test conditions / Methods	Specifications								
Tensile Strength of Terminals	Gradually applying the force specified and keeping the unit fixed for 10±1 sec. <table><tr><td><u>Terminal diameter (mm)</u></td><td><u>Force (kg)</u></td></tr><tr><td>0.5<d≤0.8</td><td>1.0</td></tr><tr><td>0.8<d≤1.25</td><td>2.0</td></tr><tr><td>1.25<d</td><td>4.0</td></tr></table>	<u>Terminal diameter (mm)</u>	<u>Force (kg)</u>	0.5<d≤0.8	1.0	0.8<d≤1.25	2.0	1.25<d	4.0	No visible damage ΔV _{1mA} /V _{1mA} ≤5%
<u>Terminal diameter (mm)</u>	<u>Force (kg)</u>									
0.5<d≤0.8	1.0									
0.8<d≤1.25	2.0									
1.25<d	4.0									
Bending Strength of Terminals	Hold specimen and apply the force specified below to each lead. Bend the specimen to 90°, then return to the original position. Repeat the procedure in the opposite direction. <table><tr><td><u>Terminal diameter (mm)</u></td><td><u>Force (kg)</u></td></tr><tr><td>0.5<d≤0.8</td><td>0.5</td></tr><tr><td>0.8<d≤1.25</td><td>1.0</td></tr><tr><td>1.25<d</td><td>2.0</td></tr></table>	<u>Terminal diameter (mm)</u>	<u>Force (kg)</u>	0.5<d≤0.8	0.5	0.8<d≤1.25	1.0	1.25<d	2.0	No visible damage ΔV _{1mA} /V _{1mA} ≤5%
<u>Terminal diameter (mm)</u>	<u>Force (kg)</u>									
0.5<d≤0.8	0.5									
0.8<d≤1.25	1.0									
1.25<d	2.0									
Vibration	Frequency range: 10~55 Hz Amplitude: 0.75mm or 98m/s ² Direction: 3 mutually perpendicular directions, 2hrs each.	No visible damage ΔV _{1mA} /V _{1mA} ≤5%								
Solder ability	Solder Temp: 245±5℃ Dipping Time: 2±0.5 sec	At least 95% of terminal electrode is covered by new solder								
Resistance to Soldering Heat	Solder Temp: 260±5℃ Dipping Time: ≤10 sec	No visible damage ΔV _{1mA} /V _{1mA} ≤10%								


Reliability

Items	Test conditions / Methods	Specifications															
High Temperature Storage	Ambient Temp: 85±2℃ Duration: 1000hrs	$ \Delta V_{1mA}/V_{1mA} \leq 5\%$															
Low Temperature Storage	Ambient Temp: -40±2℃ Duration: 1000hrs	$ \Delta V_{1mA}/V_{1mA} \leq 5\%$															
Humidity	Ambient Temp: 40±2℃, 90~95% R.H. Duration: 1000hrs	$ \Delta V_{1mA}/V_{1mA} \leq 5\%$															
Temperature Cycle	The conditions shown below shall be repeated 5 cycles <table> <tr> <th>Step</th><th>Temperature (℃)</th><th>Period (minutes)</th></tr> <tr> <td>1</td><td>-40±3</td><td>30±3</td></tr> <tr> <td>2</td><td>Room temperature</td><td>15±3</td></tr> <tr> <td>3</td><td>85±3</td><td>30±3</td></tr> <tr> <td>4</td><td>Room temperature</td><td>15±3</td></tr> </table>	Step	Temperature (℃)	Period (minutes)	1	-40±3	30±3	2	Room temperature	15±3	3	85±3	30±3	4	Room temperature	15±3	No visible damage $ \Delta V_{1mA}/V_{1mA} \leq 5\%$
Step	Temperature (℃)	Period (minutes)															
1	-40±3	30±3															
2	Room temperature	15±3															
3	85±3	30±3															
4	Room temperature	15±3															
High Temperature Load	Ambient Temp: 85±2℃ Duration: 1000hrs Load: Max. Allowable Voltage In AC era.	$ \Delta V_{1mA}/V_{1mA} \leq 10\%$															
Damp Heat Load	Ambient Temp: 40±2℃, 90~95% R.H. Duration: 1000hrs Load: Max. Allowable Voltage	No visible damage $ \Delta V_{1mA}/V_{1mA} \leq 10\%$															
Voltage Proof	Metal balls method, 2500Vac 1 min.	No visible damage															


Maximum Leakage Current and Maximum Clamping Voltage Curve

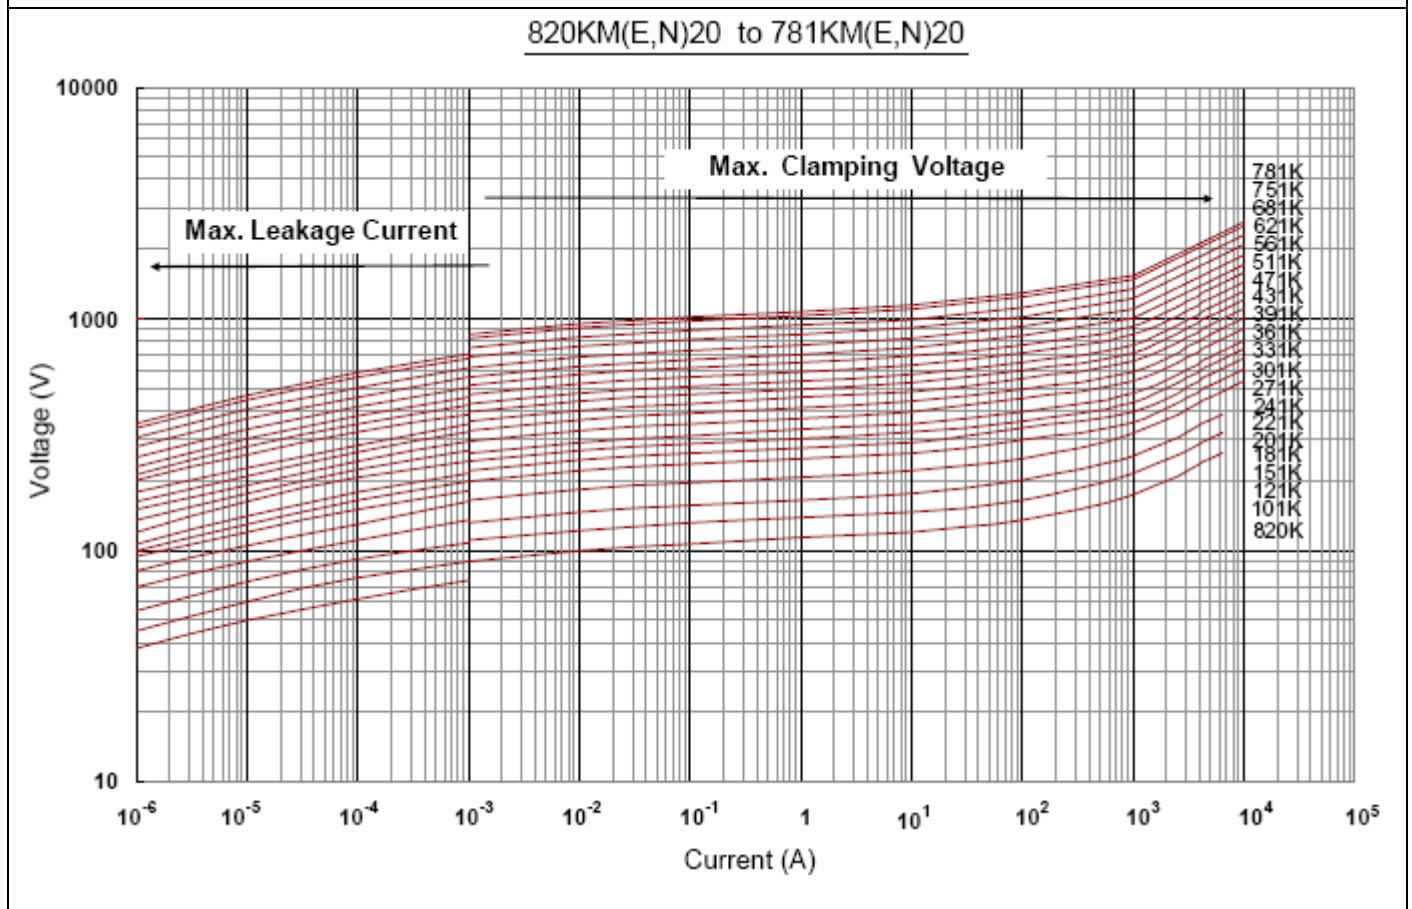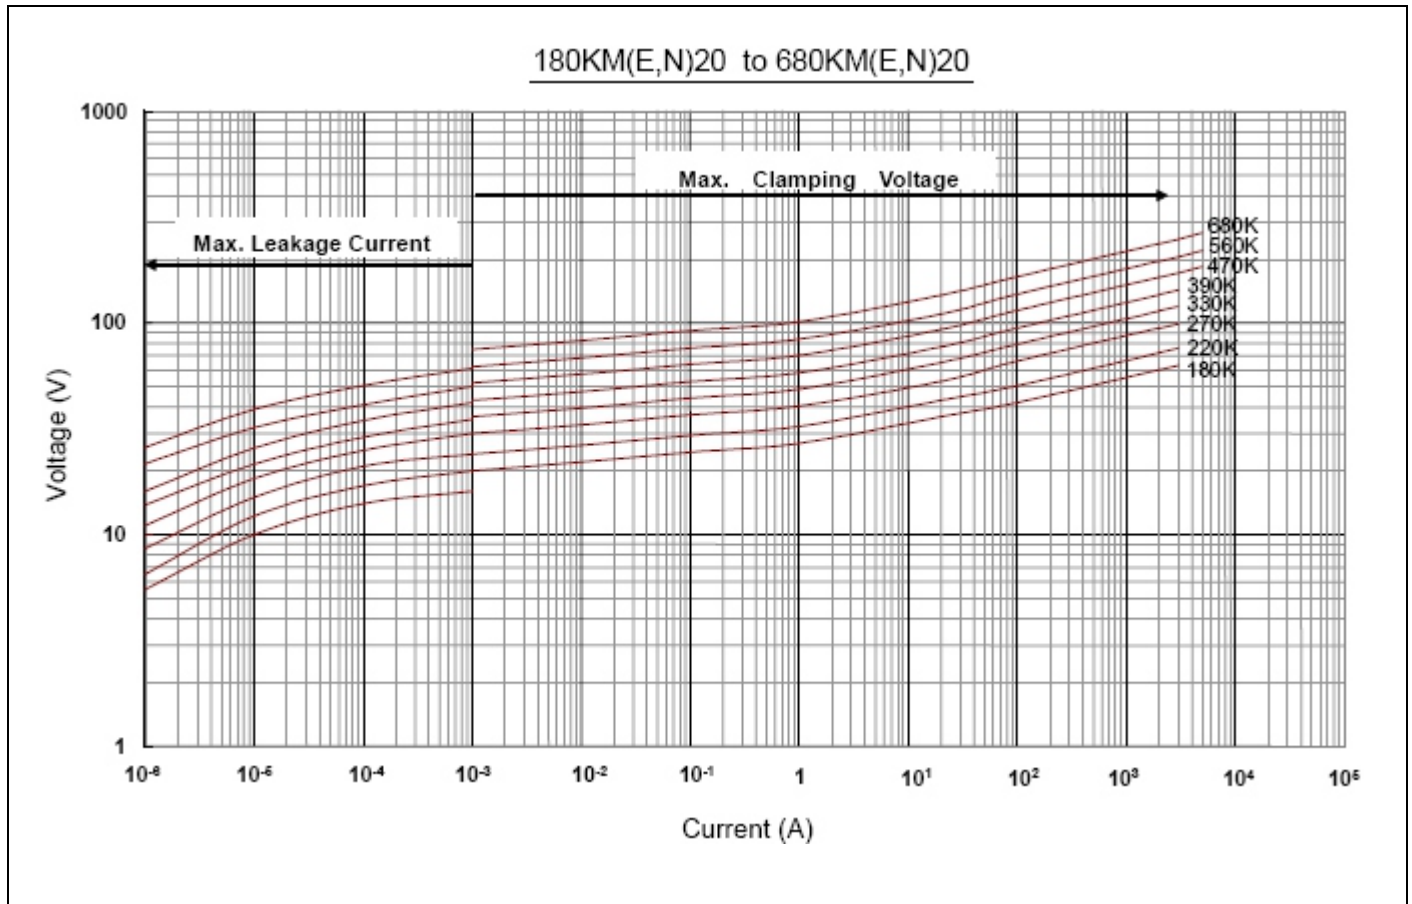


Maximum Leakage Current and Maximum Clamping Voltage Curve

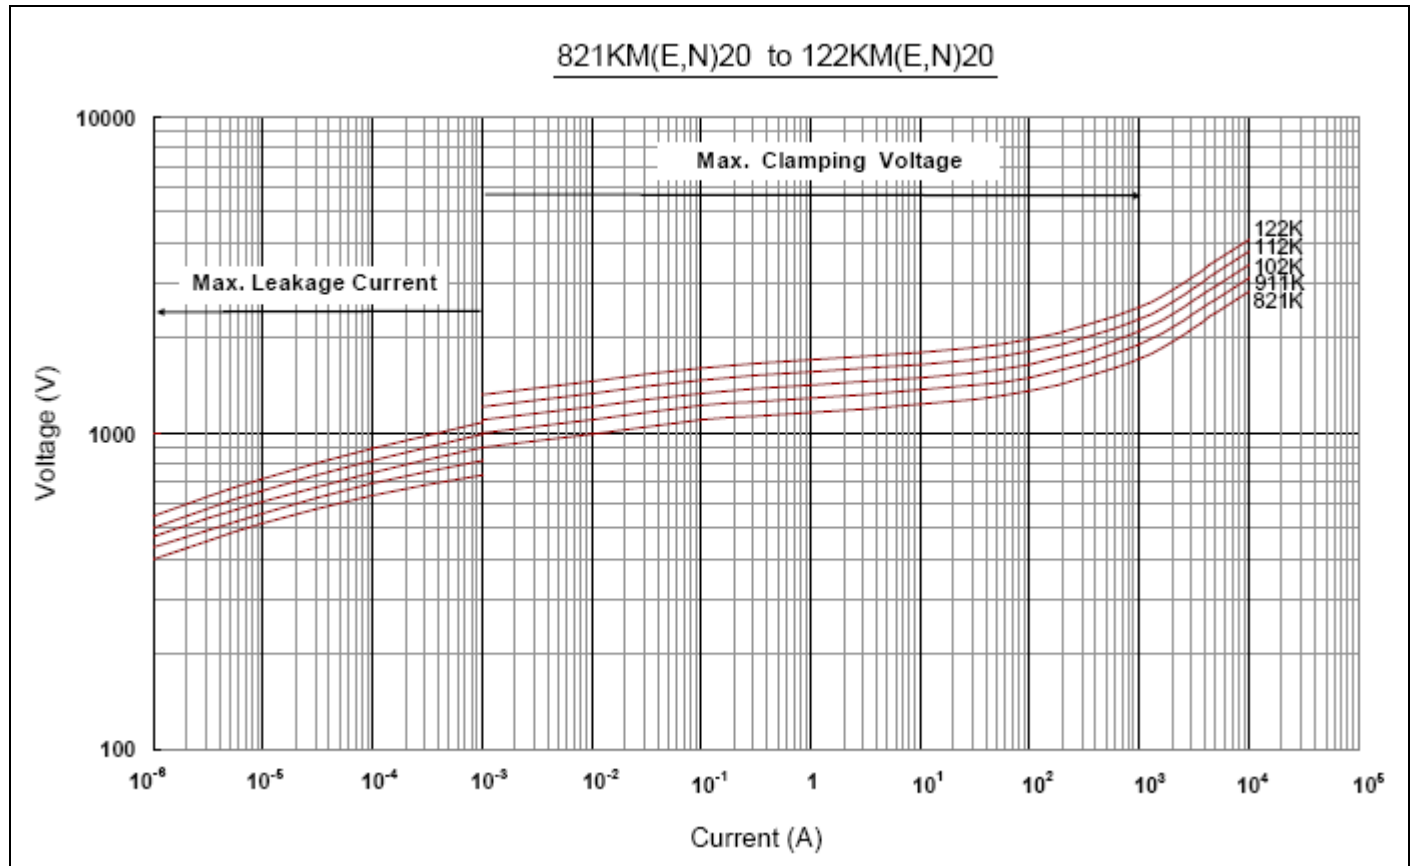


Maximum Surge Current Derating Curve

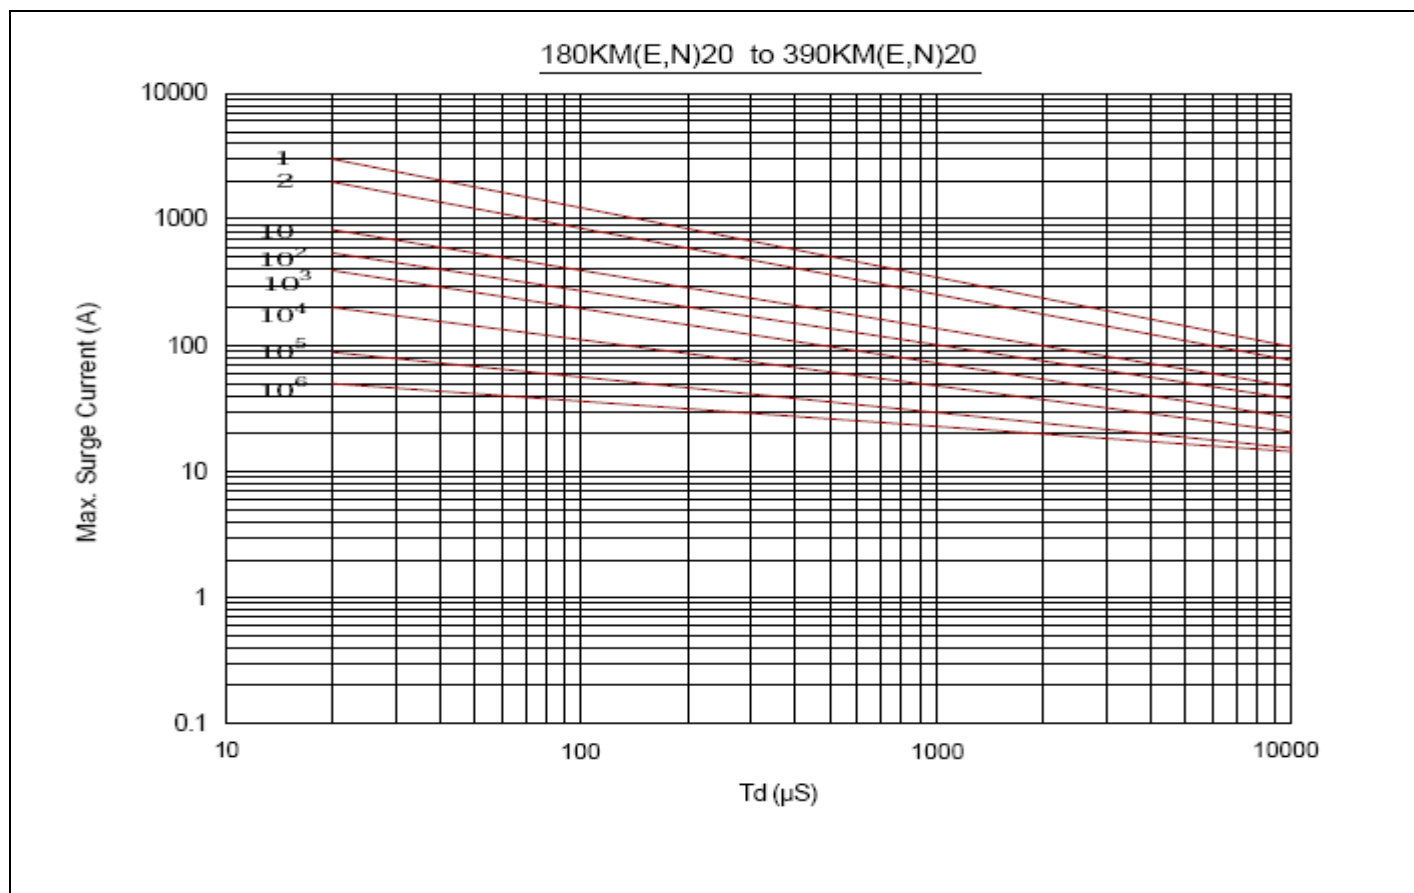


Maximum Surge Current Derating Curve

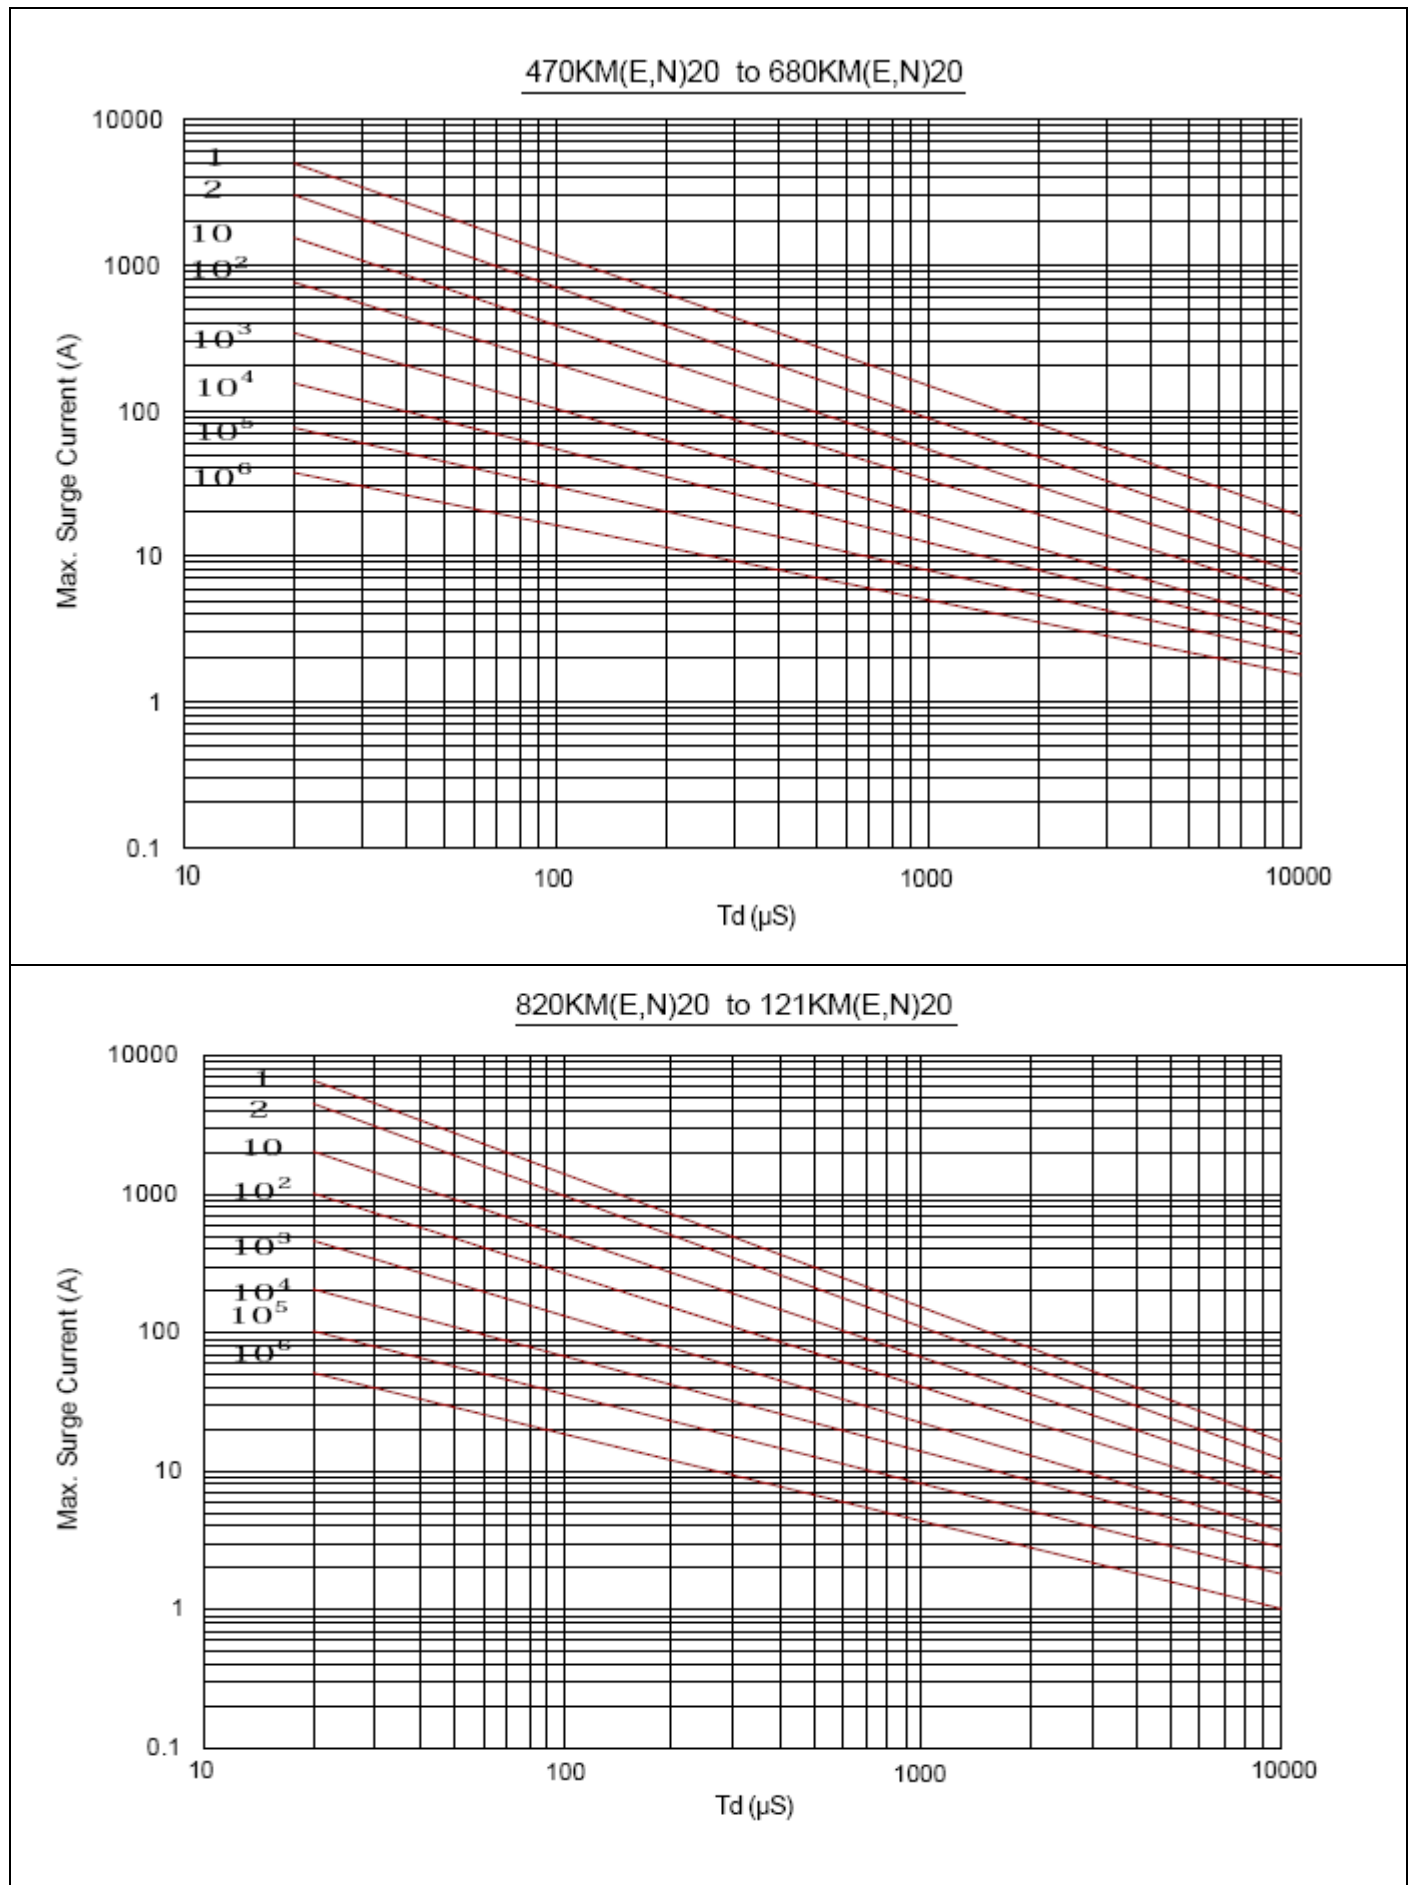


Maximum Surge Current Derating Curve

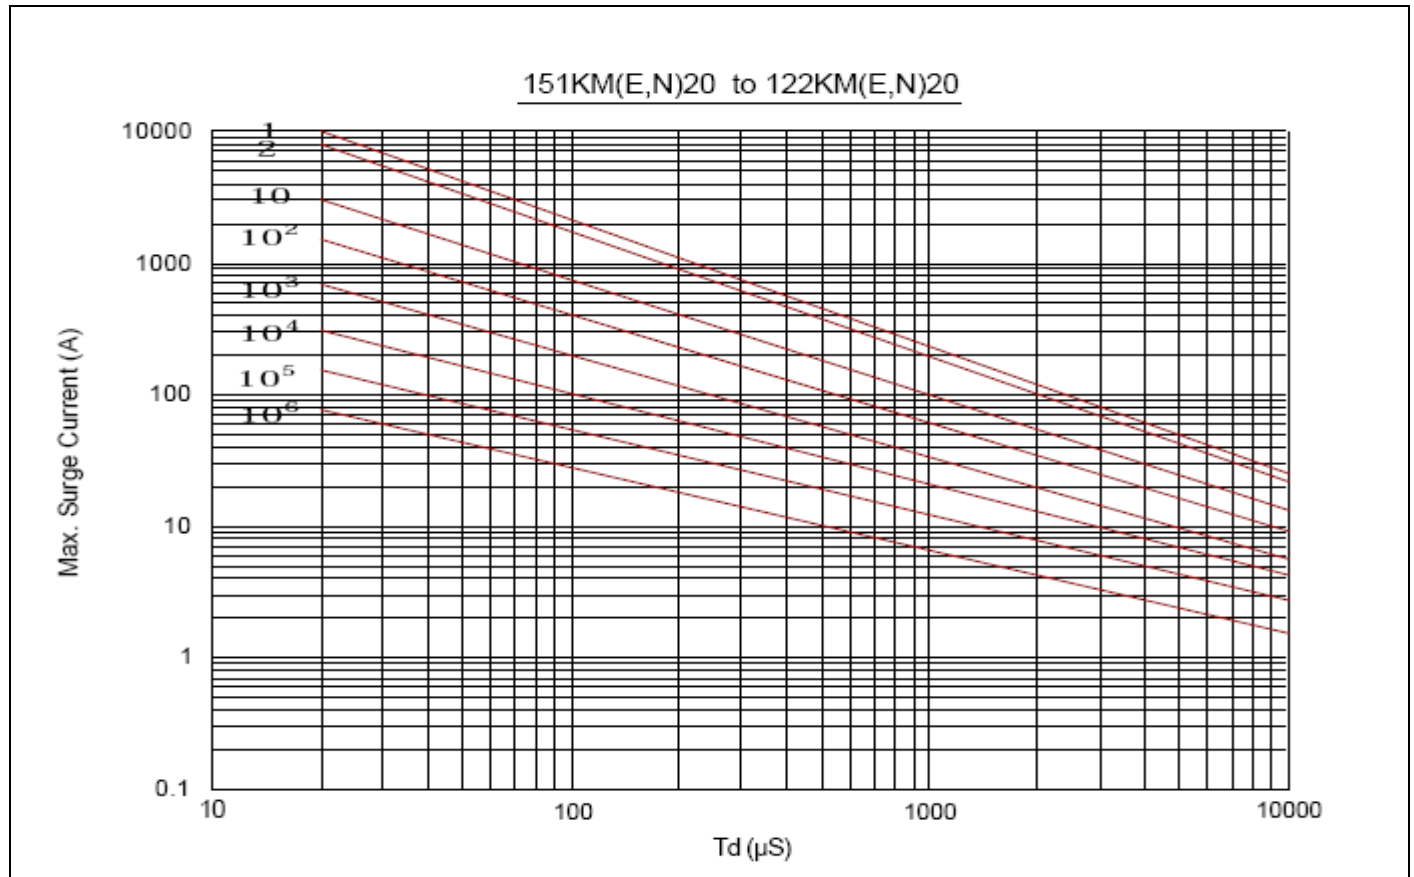

Soldering Recommendation

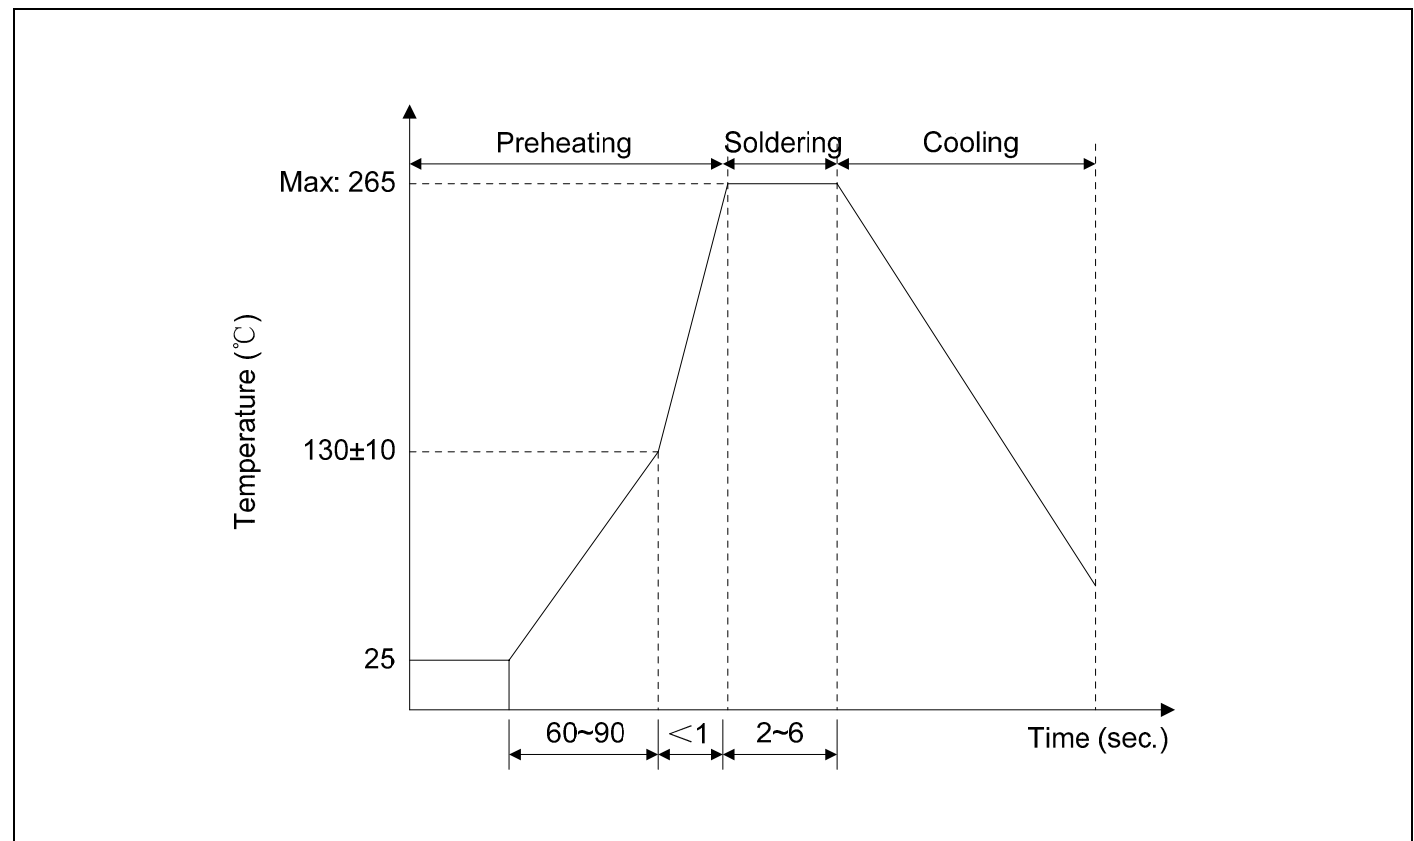

Marking code

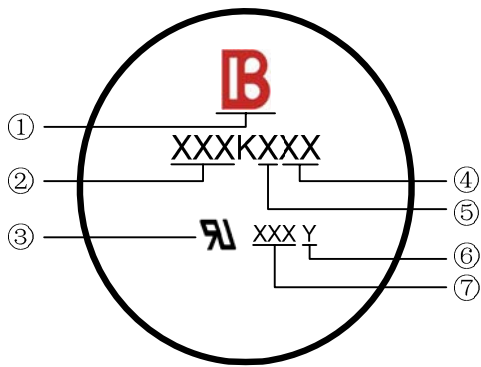

- ① Brightking Logo
- ② Varistor Voltage
- ③ UL Accreditation Logo
- ④ Disk Size
- ⑤ Different internal structure (M / E / N)
- ⑥ Product Line Code (“Y” may be A(a) thru Z(z))
- ⑦ Date Code

Quantity

Packaging Dimensions (Unit: mm)	Quantity
Bulk	100pcs/bag 2bags/box