


Performance curves

Vacuum operation

Compressor operation

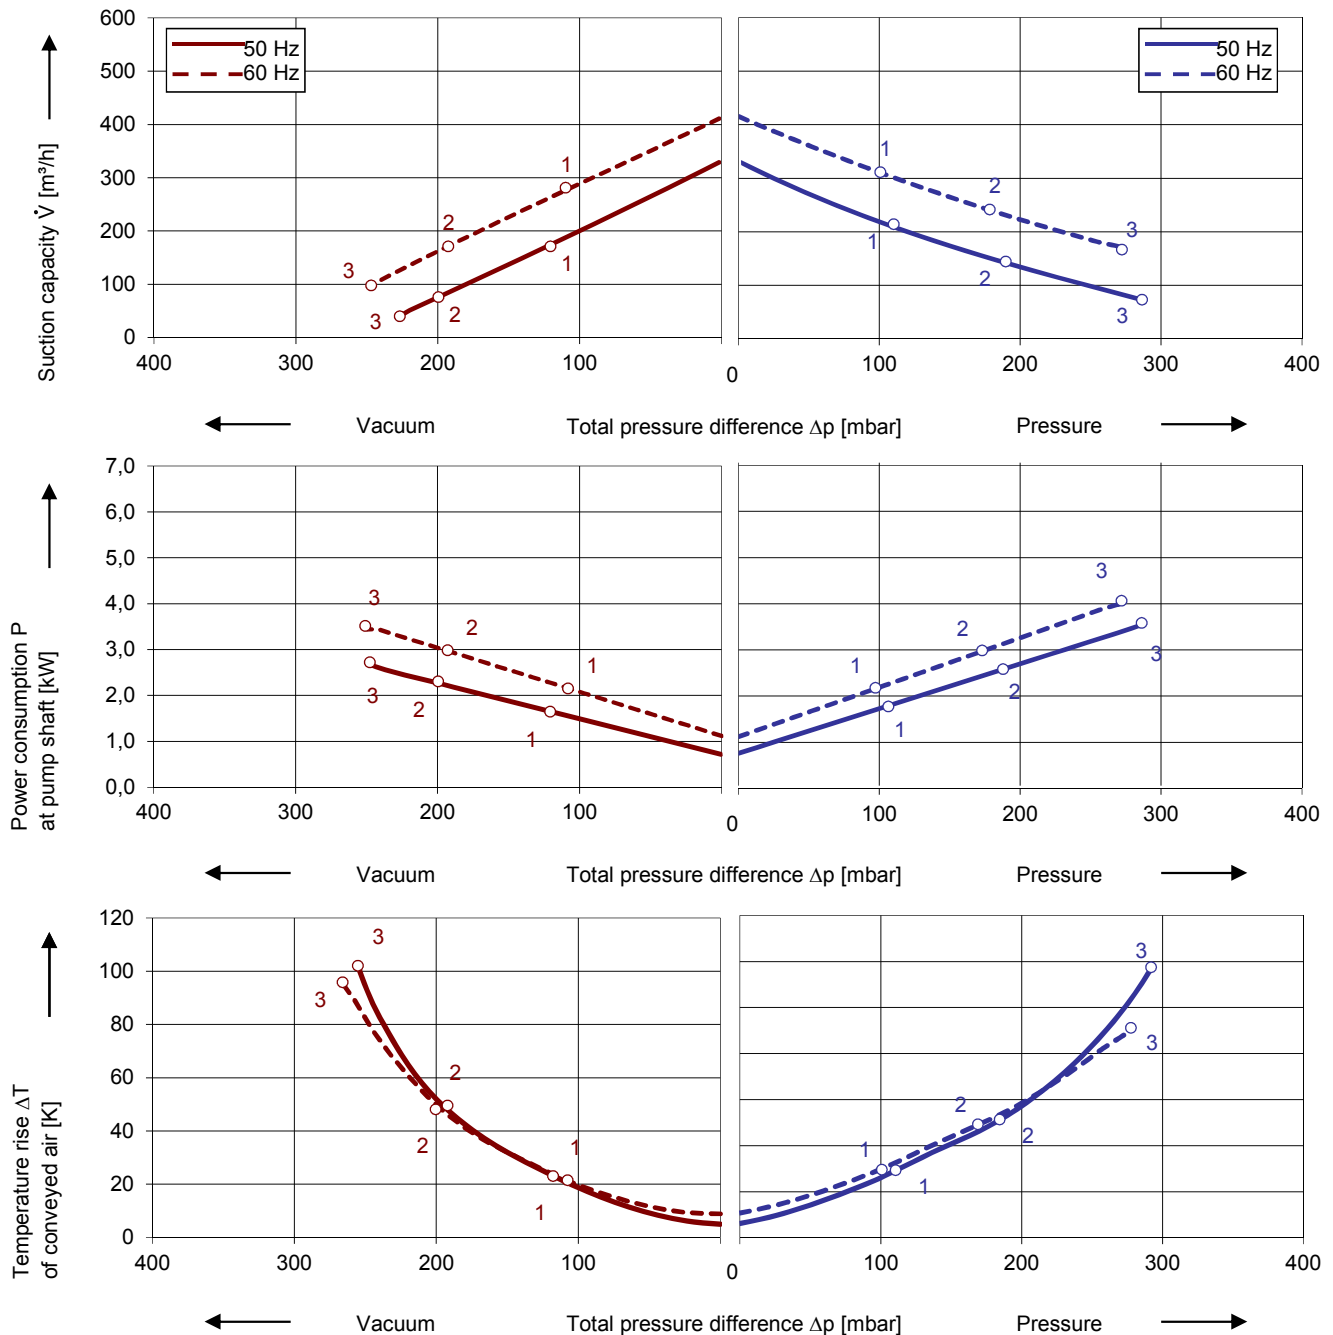

The performance curves are based on air at a temperature of 15 °C and an atmospheric pressure of 1013 mbar with a tolerance of ± 10 %. The total pressure differences are valid for suction and ambient temperature up to 25 °C. For other conditions please get in touch with us.

All Greenco blowers can be used both as vacuum pump and compressor in continuous operation over the total performance curve range. The motors are available as standard in protection category IP 55 and insulation class F.

Selection and ordering data										
Type 2RB 630										
No.	Fre- quency	Rated			Max. differential pressure ²⁾		Sound pres. Level ³⁾	Efficiency class ⁴⁾	Weight approx.	Order No.
		Voltage ¹⁾	Current	Power	Vacuum	Pressure				
	Hz	V	A	kW	mbar		dB(A)		kg	
IE3 3~ 50/60 Hz, IP55, Insulation material class F(UL certificate number E481218)										
1	50	190-210△	6.9 △	1,75	-120	110	65	IE3	30	2RB 630-1AP01
	60	190-210 YY / 380-420 Y	7.8 YY / 3.9 Y	2.0	-110	100	71	IE3		
2	50	190-210△	9.9 △	2,5	-200	190	65	IE3	34	2RB 630-1AP11
	60	190-210 YY / 380-420 Y	12.0 YY / 6.0 Y	3.0	-190	180	71	IE3		
3	50	190-210△	13.8 △	3,45	-230	280	65	IE3	38	2RB 630-1AP21
	60	190-210 YY / 380-420 Y	15.4 YY / 7.7 Y	4.0	-250	270	71	IE3		
IE3 3~ 50/60 Hz, IP55, Insulation material class F(UL certificate number E481218)										
1	50	220-240 △ / 380-420 Y	6.0 △/ 3.45 Y	1,75	-120	110	65	IE3	30	2RB 630-1AP06
	60	220-240 YY / 440-480 Y	6.8 YY/ 3.4 Y	2.0	-110	100	71	IE3		
2	50	220-240 △ / 380-420 Y	8.6 △/ 5.0Y	2,5	-200	190	65	IE3	34	2RB 630-1AP16
	60	220-240 YY / 440-480 Y	10.4 YY/ 5.2 Y	3.0	-190	180	71	IE3		
3	50	220-240 △ / 380-420 Y	12.0 △/ 6.9Y	3,45	-230	280	65	IE3	38	2RB 630-1AP26
	60	220-240 YY / 440-480 Y	13.4 YY/ 6.7 Y	4.0	-250	270	71	IE3		
IE3 3~ 50/60 Hz, IP55, Insulation material class F(UL certificate number E481218)										
1	50	380-420 △ / 660-725 Y	3.45△/ 2.0Y	1,75	-120	110	65	IE3	30	2RB 630-1AQ07
	60	440-480 △	3.40△	2.0	-110	100	71	IE3		
2	50	380-420 △ / 660-725 Y	5.0△/ 2.9Y	2,5	-200	190	65	IE3	34	2RB 630-1AQ17
	60	440-480 △	5.20△	3.0	-190	180	71	IE3		
3	50	380-420 △ / 660-725 Y	6.9△/ 4.0Y	3,45	-230	280	65	IE3	38	2RB 630-1AQ27
	60	440-480 △	6.70△	4.0	-250	270	71	IE3		
IE3 3~ 50/60 Hz, IP55, Insulation material class F(UL certificate number E481218)										
1	50	220-240 △ / 380-420 Y	6.0 △/ 3.45 Y	1,75	-120	110	65	IE3	30	2RB 630-1AQ06
	60	440-480 Y	3.4 Y	2.0	-110	100	71	IE3		
2	50	220-240 △ / 380-420 Y	8.6 △/ 5.0Y	2,5	-200	190	65	IE3	34	2RB 630-1AQ16
	60	440-480 Y	5.2 Y	3.0	-190	180	71	IE3		
3	50	220-240 △ / 380-420 Y	12.0 △/ 6.9Y	3,45	-230	280	65	IE3	38	2RB 630-1AQ26
	60	440-480 Y	6.7 Y	4.0	-250	270	71	IE3		

- 1) In case of frequency converter operation the standard motor insulation system is suitable for converter input voltages up to 500 V.
- 2) Relief valves available for limiting differential pressure.
- 3) Measuring surface sound pressure level acc. to EN ISO 3744, measured with an equivalent unit at a distance of 1 m. The pump is throttled to an average suction pressure, with piping connected, but no relief valves fitted, tolerance ±3 dB (A).
- 4) The motors according to NEMA MG1-12. NP=NEMA Premium; NEMA Premium includes IE3.
- 5) Klaxon recommended for motor overload protection. Ordering example: 2RB 630-□□□□-Z

All 2RB blowers match the 2006/42/EC (machinery) and 2014/35/EU (low voltage) directives and the EN 60034 norm "Rotating electrical machines".

Service factor (SF) and motor efficiency according NEMA MG1-12.

Voltage tolerances for three phase motors are +/-10%.

The frequency tolerance is +/- 2 % maximum.

Motor for alternate voltages						
Voltage range			Efficiency			
50 Hz	60Hz	60 Hz		2RB ...-1.	□	. □
3~						
200 VΔ	200 V YY / 230 VΔ / 400 VY		•		P	1
190-210 VΔ	190-210 VYY / 220-240 VΔ / 380-420VY	IE3				
200 V YY / 230 VΔ / 400 VY	230 V YY / 460 VY		•		P	6
190-210 VYY / 220-240 VΔ / 380-420VY	220-240 VYY / 440-480VY	IE3				
190-210 VΔ	220-240 VΔ / 380-420VY	IE3	•		Q	1
475-525 V Y	550-600 V Y					
475-525 VΔ	550-600 VΔ		•		Q	5
220-240 VΔ / 380-420 V Y	440-480VY	IE3				
400 VΔ / 690 VY	460 VΔ		•		Q	7
			•		Q	6
			•		Q	7

Changes in particular of the quoted performance curve, data and weights may occur without prior notice. The data given does not constitute an obligation from our side to deliver as shown