

Data sheet 2RB 840


Side channel blower with IE3-motors



Performance curves

Vacuum operation

Compressor operation

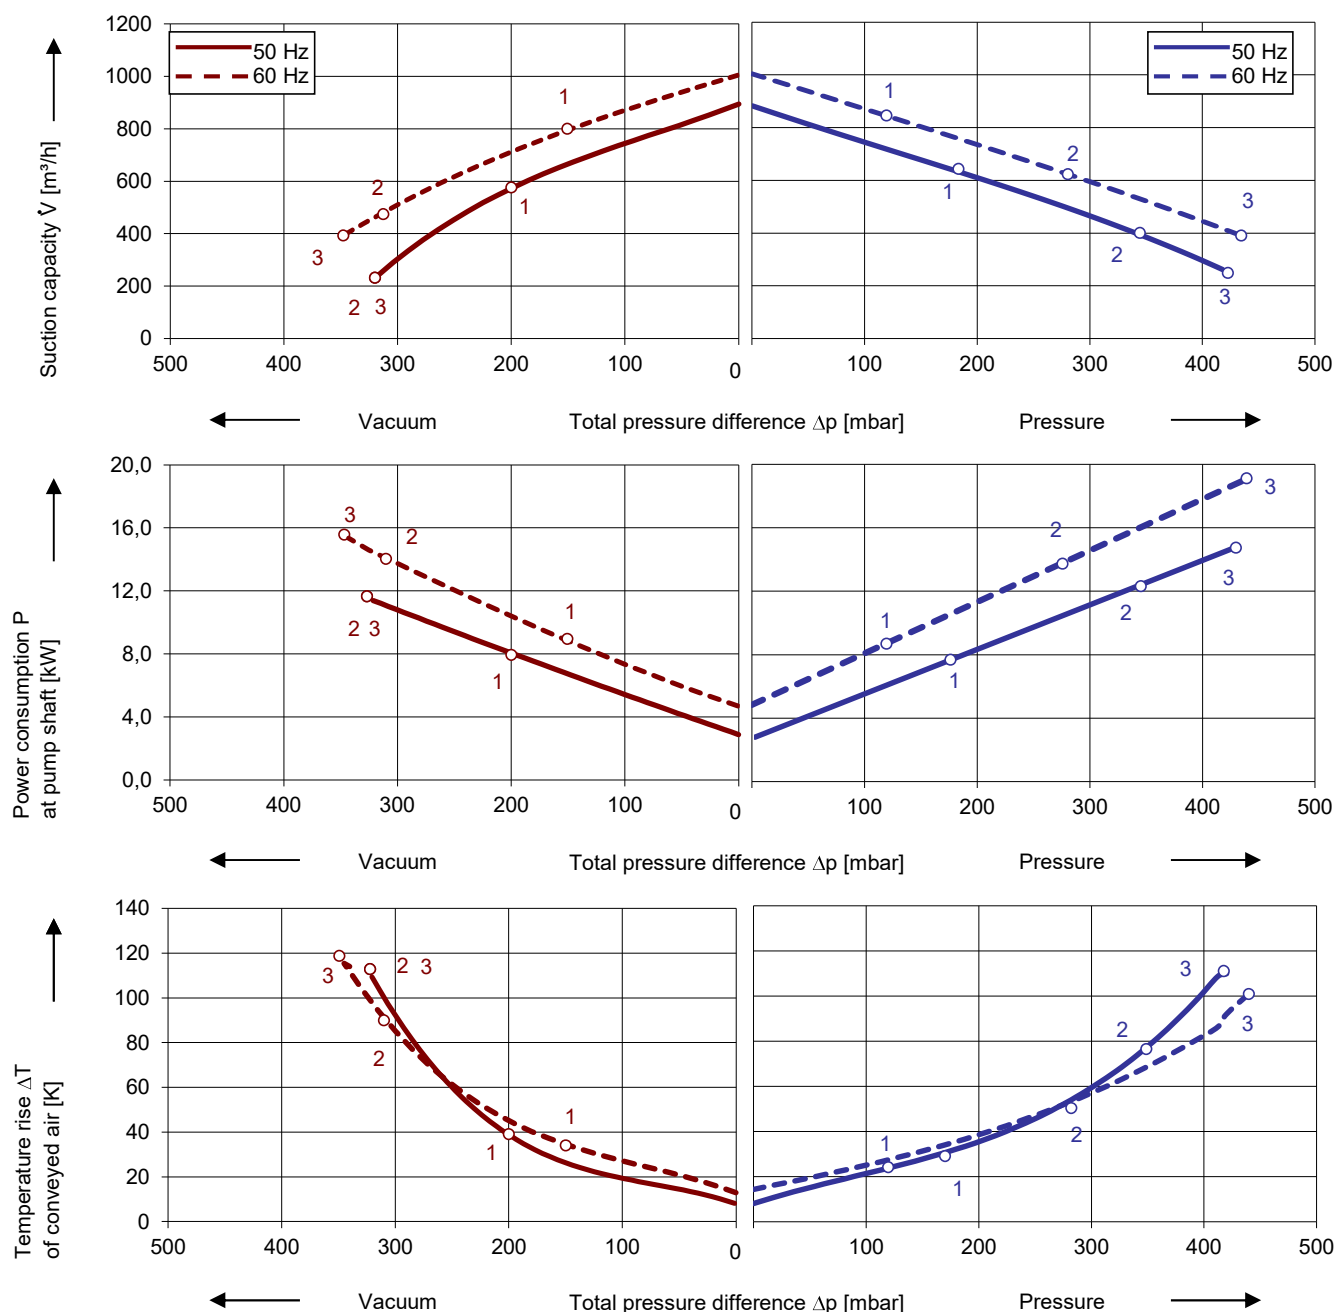

The performance curves are based on air at a temperature of 15 °C and an atmospheric pressure of 1013 mbar with a tolerance of $\pm 10\%$. The total pressure differences are valid for suction and ambient temperature up to 25 °C. For other conditions please get in touch with us.

All Greenco blowers can be used both as vacuum pump and compressor in continuous operation over the total performance curve range. The motors are available as standard in protection category IP 55 and insulation class F.

Selection and ordering data										
Type 2RB 840										
No.	Fre- quency	Rated			Max. differential pressure ²⁾		Sound pres- Level ³⁾	Efficiency class ⁴⁾	Weight approx.	Order No.
		Voltage ¹⁾	Current	Power	Vacuum	Pressure				
	Hz	V	A	kW	mbar		dB(A)		kg	
IE3 3~ 50/60 Hz, IP55, Insulation material class F (UL certificate number E481218)										
1	50	190-210△	30,8△	8,6	-200	180	70	IE3	93	2RB 840-1GP21
	60	190-210 YY/380-420 Y	35,2 YY/17,6Y	9,9	-150	120	75	IE3		
2	50	190-210△	46,4△	12,6	-320	330	70	IE3	115	2RB 840-1GP31
	60	190-210 YY/380-420 Y	52,8 YY/26,4Y	14,5	-310	280	75	IE3		
3	50	190-210△	63,0△	17,3	-320	420	70	IE3	121	2RB 840-1GP41
	60	190-210 YY/380-420 Y	72,2 YY/36,1Y	19,9	-340	440	75	IE3		
IE3 3~ 50/60 Hz, IP55, Insulation material class F (UL certificate number E481218)										
1	50	220-240△ / 380-420 Y	26,8△/15,5 Y	8,6	-200	180	70	IE3	93	2RB 840-1GP26
	60	220-240 YY / 440-480 Y	30,6YY/15,3 Y	9,9	-150	120	75	IE3		
2	50	220-240△ / 380-420 Y	40,3△/23,3 Y	12,6	-320	330	70	IE3	115	2RB 840-1GP36
	60	220-240 YY / 440-480 Y	46,0YY/23,0 Y	14,5	-310	280	75	IE3		
3	50	220-240△ / 380-420 Y	54,9△/31,7 Y	17,3	-320	420	70	IE3	121	2RB 840-1GP46
	60	220-240 YY / 440-480 Y	62,8YY/31,4 Y	19,9	-340	440	75	IE3		
IE3 3~ 50/60 Hz, IP55, Insulation material class F (UL certificate number E481218)										
1	50	380-420△ / 660-725 Y	15,5△/8,9 Y	8,6	-200	180	70	IE3	93	2RB 840-1GQ27
	60	440-480△	15,3△	9,9	-150	120	75	IE3		
2	50	380-420△ / 660-725 Y	23,3△/13,4 Y	12,6	-320	330	70	IE3	115	2RB 840-1GQ37
	60	440-480△	23,0△	14,5	-310	280	75	IE3		
3	50	380-420△ / 660-725 Y	31,7△/18,3 Y	17,3	-320	420	70	IE3	121	2RB 840-1GQ47
	60	440-480△	31,4△	19,9	-340	440	75	IE3		
IE3 3~ 50/60 Hz, IP55, Insulation material class F (UL certificate number E481218)										
1	50	220-240△ / 380-420 Y	26,8△/15,5 Y	8,6	-200	180	71	IE3	93	2RB 840-1GQ26
	60	440-480Y	15,3Y	9,9	-150	120	76	IE3		
2	50	220-240△ / 380-420 Y	40,3△/23,3 Y	12,6	-320	330	71	IE3	115	2RB 840-1GQ36
	60	440-480Y	23,0Y	14,5	-310	280	76	IE3		
3	50	220-240△ / 380-420 Y	40,3△/23,3 Y	17,3	-320	420	71	IE3	121	2RB 840-1GQ46
	60	440-480Y	31,4Y	19,9	-340	440	76	IE3		

- 1) In case of frequency converter operation the standard motor insulation system is suitable for converter input voltages up to 500 V.
- 2) Relief valves available for limiting differential pressure.
- 3) Measuring surface sound pressure level acc. to EN ISO 3744, measured with an equivalent unit at a distance of 1 m. The pump is throttled to an average suction pressure, with piping connected, but no relief valves fitted, tolerance ± 3 dB (A).
- 4) The motors according to NEMA MG1-12. NP=NEMA Premium; NEMA Premium includes IE3.
- 5) Klixon recommended for motor overload protection. Ordering example: 2RB 310-□□□□-Z

Motor for alternate voltages										
Voltage range					Efficiency					
50 Hz		60Hz				60 Hz	2 RB ...-1.	□	.	□
3~										
200 VΔ		200 V YY / 230 VΔ / 400 VY				•		P	1	
190-210 VΔ		190-210 VYY / 220-240 VΔ / 380-420VY								
200 V YY / 230 VΔ / 400 VY		230 V YY / 460 VY				•		P	6	
190-210 VYY / 220-240 VΔ / 380-420VY		220-240 VYY / 440-480VY								
190-210 VΔ		220-240 VΔ / 380-420VY				•		Q	1	
475-525 V Y		550-600 V Y						Q	3	
475-525 VΔ		550-600 VΔ				•		Q	5	
220-240 VΔ / 380-420VY		440-480VY						Q	6	
400 VΔ / 690 V Y		460 VΔ				•		Q	7	

changes in particular of the quoted performance curve, data and weights may occur without prior notice. The data given does not constitute an obligation from our side to deliver as shown