


Performance curves

Vacuum operation

Compressor operation

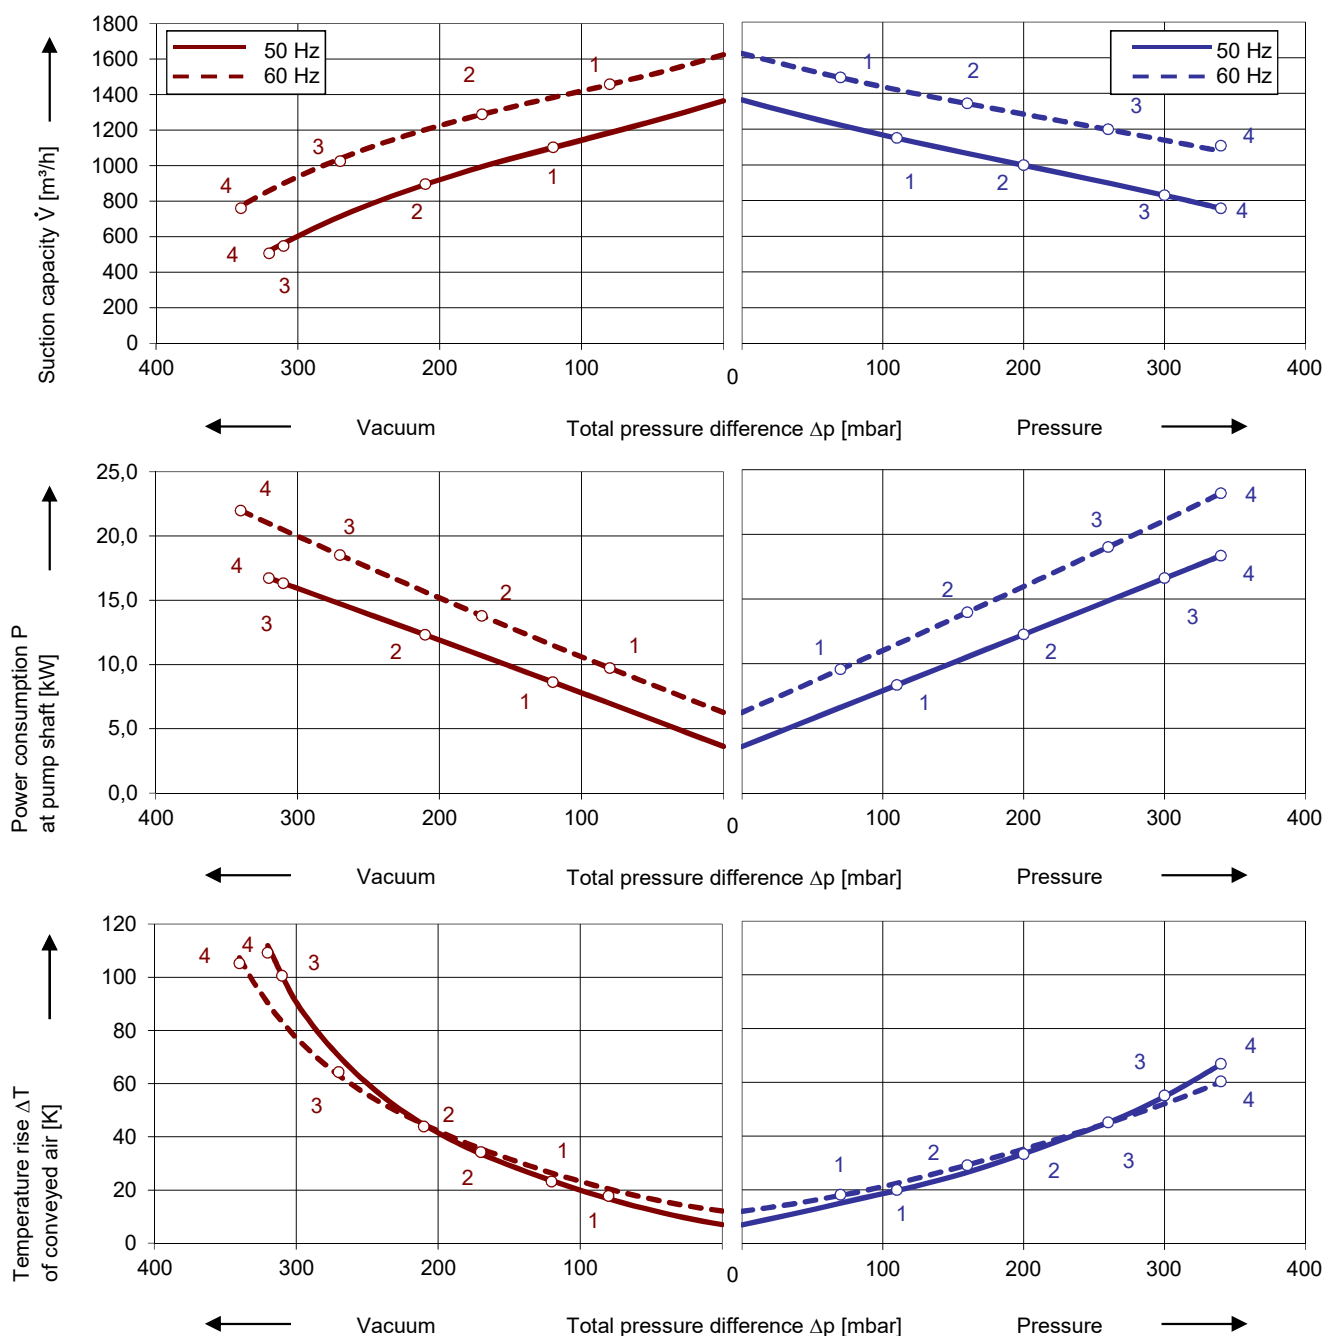

The performance curves are based on air at a temperature of 15 °C and an atmospheric pressure of 1013 mbar with a tolerance of ± 10 %. The total pressure differences are valid for suction and ambient temperature up to 25 °C. For other conditions please get in touch with us.

All Greenco blowers can be used both as vacuum pump and compressor in continuous operation over the total performance curve range. The motors are available as standard in protection category IP 55 and insulation class F.

Selection and ordering data										
Type 2RB 930										
No.	Fre- quency	Rated			Max. differential pressure ²⁾		Sound pres. Level ³⁾	Efficiency class ⁴⁾	Weight approx.	Order No.
		Voltage ¹⁾	Current	Power	Vacuum	Pressure				
		Hz	V	A	kW	mbar				
IE3 3~ 50/60 Hz, IP55, Insulation material class F (UL certificate number E481218)										
1	50	190-210△	30,8△	8,6	-120	110	71	IE3	105	2RB 930-1AP01
	60	190-210 YY / 380-420 Y	35,2 YY/ 17,6 Y	9,9	-80	70	75	IE3		
2	50	190-210△	46,4△	12,6	-210	200	74	IE3	130	2RB 930-1AP11
	60	190-210 YY / 380-420 Y	52,8 YY/ 26,4 Y	14,5	-170	160	78	IE3		
3	50	190-210△	63,1△	17,3	-310	300	74	IE3	138	2RB 930-1AP21
	60	190-210 YY / 380-420 Y	72,2 YY/ 36,1 Y	19,9	-270	260	78	IE3		
4	50	190-210△	76,2△	21,3	-320	370	74	IE3	143	2RB 930-1AP31
	60	190-210 YY / 380-420 Y	87,4YY/ 43,7 Y	24,5	-340	340	78	IE3		
IE3 3~ 50/60 Hz, IP55, Insulation material class F (UL certificate number E481218)										
1	50	220-240 △ / 380-420 Y	26,8 △/ 15,5 Y	8,6	-120	110	71	IE3	105	2RB 930-1AP06
	60	220-240 YY / 440-480 Y	30,6 YY/ 15,3 Y	9,9	-80	70	75	IE3		
2	50	220-240 △ / 380-420 Y	40,3 △/ 23,3 Y	12,6	-210	200	74	IE3	130	2RB 930-1AP16
	60	220-240 YY / 440-480 Y	46,0 YY/ 23,0 Y	14,5	-170	160	78	IE3		
3	50	220-240 △ / 380-420 Y	54,9 △/ 31,7 Y	17,3	-310	300	74	IE3	138	2RB 930-1AP26
	60	220-240 YY / 440-480 Y	62,8 YY/ 31,4 Y	19,9	-270	260	78	IE3		
4	50	220-240 △ / 380-420 Y	66,3 △/ 38,3 Y	21,3	-320	370	74	IE3	143	2RB 930-1AP36
	60	220-240 YY / 440-480 Y	76,0 YY/ 38,0 Y	24,5	-340	340	78	IE3		
IE3 3~ 50/60 Hz, IP55, Insulation material class F (UL certificate number E481218)										
1	50	380-420 △ / 660-725 Y	15,5△/ 8,9 Y	8,6	-120	110	71	IE3	105	2RB 930-1AQ07
	60	440-480△	15,3 △	9,9	-80	70	75	IE3		
2	50	380-420 △ / 660-725 Y	23,3 △/ 13,4 Y	12,6	-210	200	74	IE3	130	2RB 930-1AQ17
	60	440-480△	23,0△	14,5	-170	160	78	IE3		
3	50	380-420 △ / 660-725 Y	31,7 △/ 18,3 Y	17,3	-310	300	74	IE3	138	2RB 930-1AQ27
	60	440-480△	31,4△	19,9	-270	260	78	IE3		
4	50	380-420 △ / 660-725 Y	38,3 △/ 22,1 Y	21,3	-320	370	74	IE3	143	2RB 930-1AQ37
	60	440-480△	38,0△	24,5	-340	340	78	IE3		
IE3 3~ 50/60 Hz, IP55, Insulation material class F (UL certificate number E481218)										
1	50	220-240 △ / 380-420 Y	26,8 △/ 15,5 Y	8,6	-120	110	71	IE3	105	2RB 930-1AQ06
	60	440-480 Y	15,3 Y	9,9	-80	70	75	IE3		
2	50	220-240 △ / 380-420 Y	40,3 △/ 23,3 Y	12,6	-210	200	74	IE3	130	2RB 930-1AQ16
	60	440-480 Y	23,0 Y	14,5	-170	160	78	IE3		
3	50	220-240 △ / 380-420 Y	54,9 △/ 31,7 Y	17,3	-310	300	74	IE3	138	2RB 930-1AQ26
	60	440-480 Y	31,4 Y	19,9	-270	260	78	IE3		
4	50	220-240 △ / 380-420 Y	66,3 △/ 38,3 Y	21,3	-320	370	74	IE3	143	2RB 930-1AQ36
	60	440-480 Y	38,0Y	24,5	-340	340	78	IE3		

- 1) In case of frequency converter operation the standard motor insulation system is suitable for converter input voltages up to 500 V.
- 2) Relief valves available for limiting differential pressure.
- 3) Measuring surface sound pressure level acc. to EN ISO 3744, measured with an equivalent unit at a distance of 1 m. The pump is throttled to an average suction pressure, with piping connected, but no relief valves fitted, tolerance ±3 dB (A).
- 4) The motors according to NEMA MG1-12. NP=NEMA Premium; NEMA Premium includes IE3.
- 5) Klaxon recommended for motor overload protection. Ordering example: 2RB 710-□□□□-Z

All 2RB blowers match the 2006/42/EC (machinery) and 2014/35/EU (low voltage) directives and the EN 60034 norm "Rotating electrical machines".

Service factor (SF) and motor efficiency according NEMA MG1-12.

Voltage tolerances for three phase motors are +/-10%.

The frequency tolerance is +/- 2 % maximum.

Motor for alternate voltages						
Voltage range			Efficiency			
50 Hz	60Hz			60 Hz	2RB ...-1.	
3~						
200 VΔ	200 V YY / 230 VΔ / 400 VY			•		P
190-210 VΔ	190-210 VYY / 220-240 VΔ / 380-420VY		IE3			1
200 V YY / 230 VΔ / 400 VY	230 V YY / 460 VY			•		P
190-210 VYY / 220-240 VΔ / 380-420VY	220-240 VYY / 440-480VY		IE3			6
190-210 VΔ	220-240 VΔ / 380-420VY		IE3	•		Q
475-525 V Y	550-600 V Y					3
475-525 VΔ	550-600 VΔ			•		Q
220-240 VΔ / 380-420 V Y	440-480VY		IE3			6
400 VΔ / 690 V Y	460 VΔ			•		Q
						7

Changes in particular of the quoted performance curve, data and weights may occur without prior notice. The data given does not constitute an obligation from our side to deliver as shown