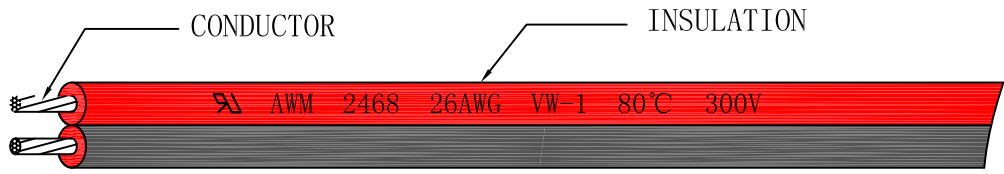


SPECIFICATION

Style number:	UL2468	Document Number	Made Date	Rev.
Specification:	26AWGx2F	WCH18101703	2018-10-17	1.0V
Cross Section				
Technical Parameters				
Conductor	Conductor Gauge (AWG)	26		
	Material	Tinned Stranded Copper		
	Configuration (mm)	TS7/0.16±0.007		
Insulation	Average Thickness (mm)	0.43		
	Minimum Thickness (mm)	0.34		
	Over Diameter (mm)	1.40±0.10		
	Pitch Distance (mm)	1.40		
	Width (mm)	2.80±0.10		
	Minimum Pins Quantity	2 Pins		
	Maximum Pins Quantity	2 Pins		
	Material	38P PVC (RoHS)		
	Colour	Red + Black		
Electrical Capability	Rated Temperature (°C)	80		
	Rated Voltage (V)	300		
	Conductor Resistance (Ω/KM 20°C)	150		
	Insulation Resistance (MΩ/KM 20°C)	10		
Physical Characters	Flame Test	VW-1, FT1		
Marking	As per standard of UL2468			