


Performance curves

Vacuum operation

Compressor operation

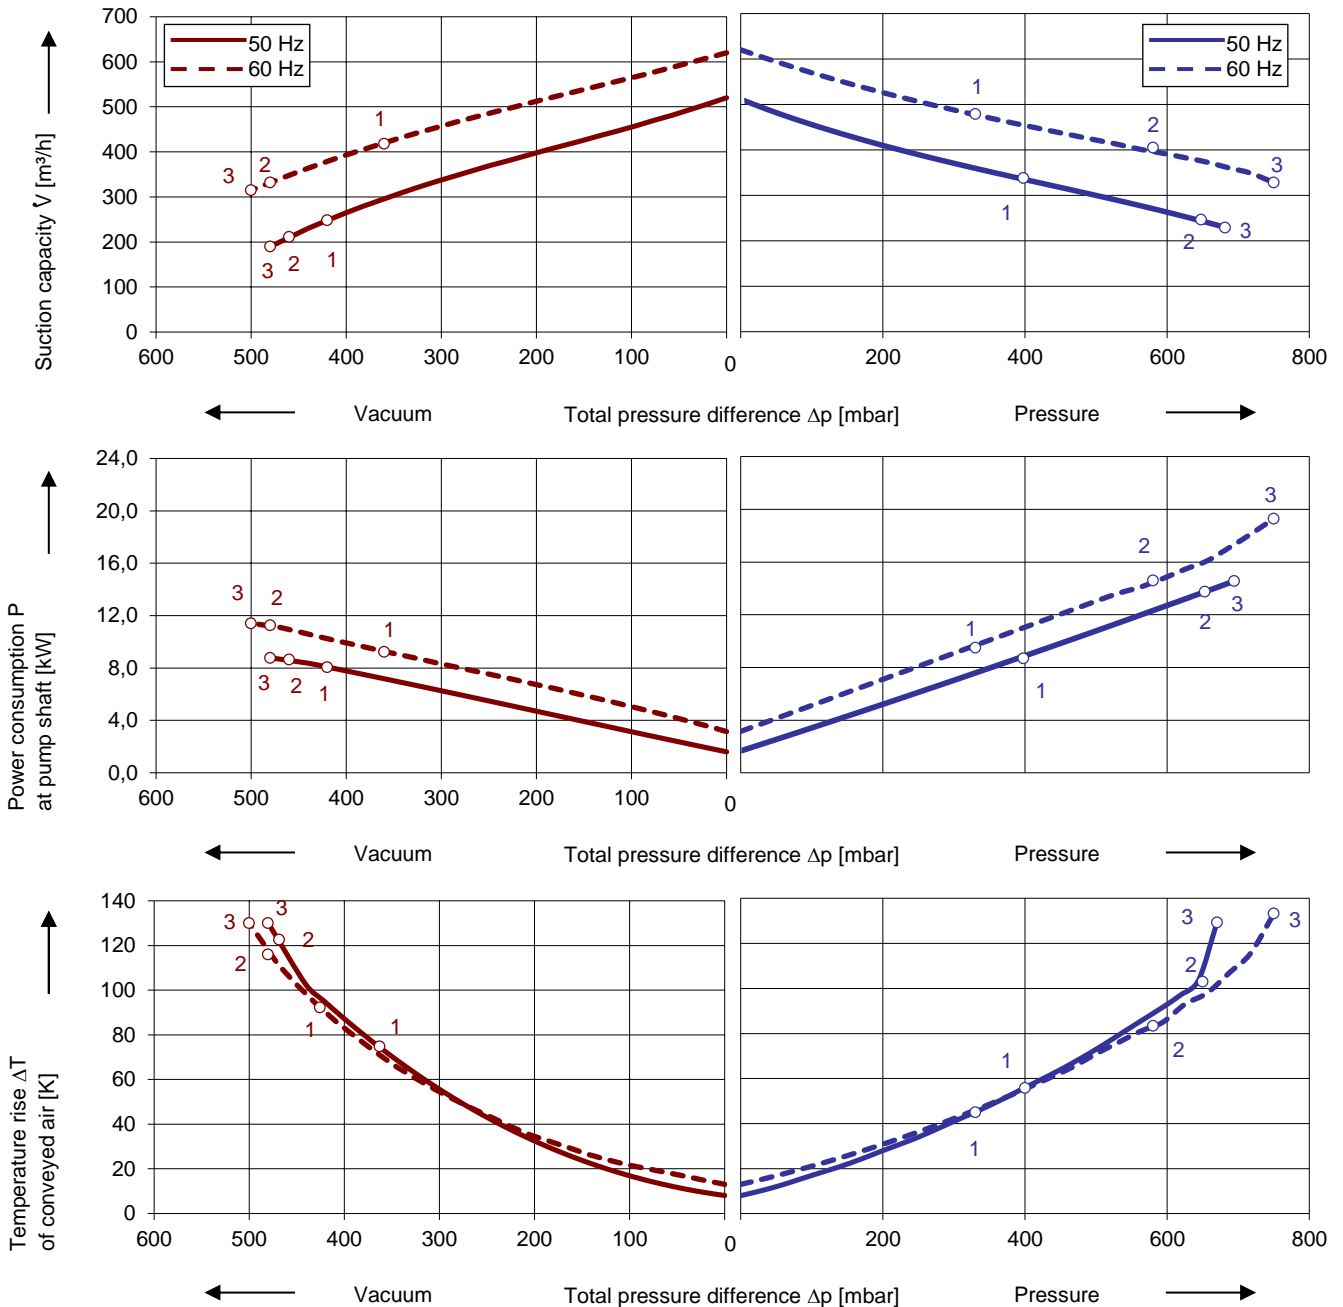

The performance curves are based on air at a temperature of 15 °C and an atmospheric pressure of 1013 mbar with a tolerance of $\pm 10\%$. The total pressure differences are valid for suction and ambient temperature up to 25 °C. For other conditions please get in touch with us.

All Greenco blowers can be used both as vacuum pump and compressor in continuous operation over the total performance curve range. The motors are available as standard in protection category IP 55 and insulation class F.

Selection and ordering data

Type 2RB 820

No.	Frequency Hz	Rated			Max. differential pressure ²⁾		Sound pres. Level ³⁾ dB(A)	Efficiency class ⁴⁾	Weight approx. kg	Order No.
		Voltage ¹⁾	Current	Power	Vacuum	Pressure				
		V	A	kW	mbar					
IE3 3~ 50/60 Hz, IP55, Insulation material class F(UL certificate number E481218)										
1	50	190-210△	30,8△	8,6	-420	400	71	IE3	92	2RB 820-1HP21
	60	190-210 YY/380-420 Y	35,2 YY/17,6Y	9,9	-360	330	76	IE3		
2	50	190-210△	46,4△	12,6	-460	650	71	IE3	114	2RB 820-1HP31
	60	190-210 YY/380-420 Y	52,8 YY/26,4Y	14,5	-480	580	76	IE3		
3	50	190-210△	63,0△	17,3	-460	670	71	IE3	120	2RB 820-1HP41
	60	190-210 YY/380-420 Y	72,2 YY/36,1Y	19,9	-480	750	76	IE3		
IE3 3~ 50/60 Hz, IP55, Insulation material class F(UL certificate number E481218)										
1	50	220-240△ / 380-420 Y	26,8△/15,5 Y	8,6	-420	400	71	IE3	92	2RB 820-1HP26
	60	220-240 YY / 440-480 Y	30,6YY/15,3 Y	9,9	-360	330	76	IE3		
2	50	220-240△ / 380-420 Y	40,3△/23,3 Y	12,6	-460	650	71	IE3	114	2RB 820-1HP36
	60	220-240 YY / 440-480 Y	46,0YY/23,0 Y	14,5	-480	580	76	IE3		
3	50	220-240△ / 380-420 Y	54,9△/31,7 Y	17,3	-460	670	71	IE3	120	2RB 820-1HP46
	60	220-240 YY / 440-480 Y	62,8YY/31,4 Y	19,9	-480	750	76	IE3		
IE3 3~ 50/60 Hz, IP55, Insulation material class F(UL certificate number E481218)										
1	50	380-420△ / 660-725 Y	15,5△/8,9 Y	8,6	-420	400	71	IE3	92	2RB 820-1HQ27
	60	440-480△	15,3△	9,9	-360	330	76	IE3		
2	50	380-420△ / 660-725 Y	23,3△/13,4 Y	12,6	-460	650	71	IE3	114	2RB 820-1HQ37
	60	440-480△	23,0△	14,5	-480	580	76	IE3		
3	50	380-420△ / 660-725 Y	31,7△/18,3 Y	17,3	-460	670	71	IE3	120	2RB 820-1HQ47
	60	440-480△	31,4△	19,9	-480	750	76	IE3		
IE3 3~ 50/60 Hz, IP55, Insulation material class F(UL certificate number E481218)										
1	50	220-240△ / 380-420 Y	26,8△/15,5 Y	8,6	-420	400	71	IE3	92	2RB 820-1HQ26
	60	440-480Y	15,3Y	9,9	-360	330	76	IE3		
2	50	220-240△ / 380-420 Y	40,3△/23,3 Y	12,6	-460	650	71	IE3	114	2RB 820-1HQ36
	60	440-480Y	23,0Y	14,5	-480	580	76	IE3		
3	50	220-240△ / 380-420 Y	55,0△/31,7 Y	17,3	-460	670	71	IE3	120	2RB 820-1HQ46
	60	440-480Y	31,4Y	19,9	-480	750	76	IE3		

- In case of frequency converter operation the standard motor insulation system is suitable for converter input voltages up to 500 V.
- Relief valves available for limiting differential pressure.
- Measuring surface sound pressure level acc. to EN ISO 3744, measured with an equivalent unit at a distance of 1 m. The pump is throttled to an average suction pressure, with piping connected, but no relief valves fitted, tolerance ±3 dB (A).
- The motors according to NEMA MG1-12. NP=NEMA Premium; NEMA Premium includes IE3.
- Klixon recommended for motor overload protection. Ordering example: 2RB 820-□□□□-Z

All 2RB blowers match the 2006/42/EC (machinery) and 2014/35/EU (low voltage) directives and the EN 60034 norm "Rotating electrical machines".

Service factor (SF) and motor efficiency according NEMA MG1-12.

Voltage tolerances for three phase motors are +/-10%.

The frequency tolerance is +/- 2 % maximum.

Motor for alternate voltages

Voltage range		Efficiency ⁵⁾	60 Hz	2RB ...-1. □ . □
50 Hz	60Hz			
3~				
200 V△	200 V YY / 230 V△ / 400 VY		•	P 1
190-210 V△	190-210 VYY / 220-240 V△ / 380-420VY		•	P 6
200 V YY / 230 V△ / 400 VY	230 V YY / 460 VY		•	P 6
190-210 VYY / 220-240 V△ / 380-420VY	220-240 VYY / 440-480VY		•	P 6
475-525 V Y	550-600 V Y		•	Q 3
475-525 V△	550-600 V△		•	Q 5
220-240 V△ / 380-420 V Y	440-480VY		•	Q 6
400 V△ / 690 V Y	460 V△		•	Q 7

Changes in particular of the quoted performance curve, data and weights may occur without prior notice. The data given does not constitute an obligation from our side to deliver as shown